


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9260BLK
HOUSING: MOLDED NYLON.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
2. P/N: 9260RED
HOUSING: MOLDED NYLON.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
3. P/N: 9230
BODY & FITTINGS: BRASS. NICKEL PLATED.
PIN: BRASS. GOLD PLATED.
DIELECTRIC: PTFE.
4. P/N: 0482
HOUSING: MOLDED DELRIN. BLACK.
5. P/N: W-600/0
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
6. P/N: W-600/2
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
7. PERFORMANCE:
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F [105°C]

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

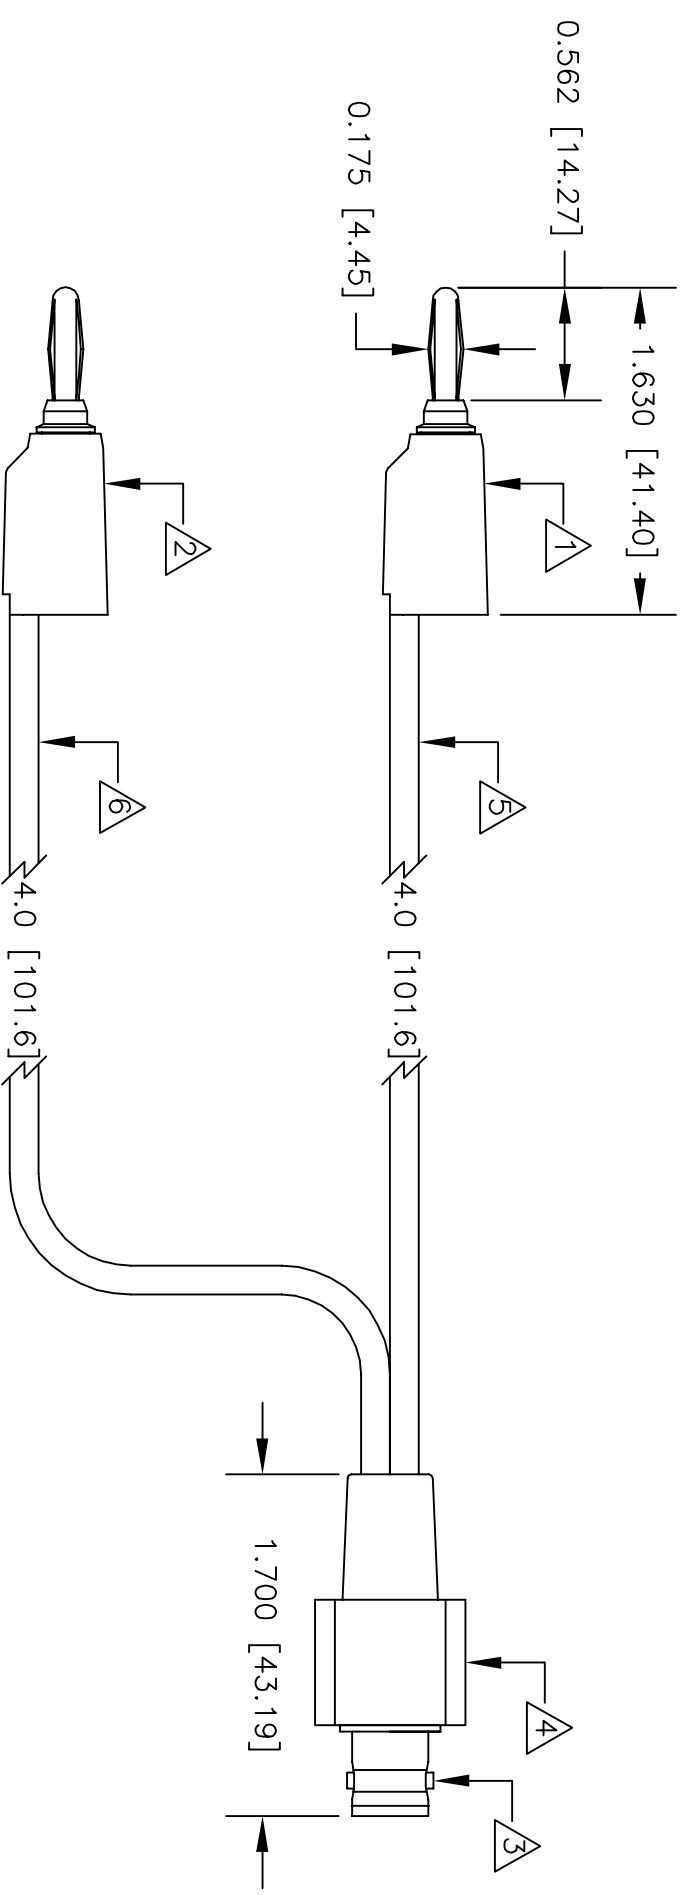

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	± .XXX ±	APPROVALS	DATE
±	±	R.L.	10/10
MATERIAL SEE NOTE.		APPROVED BY	
FINISH SEE NOTE.			
NEXT ASSY		USED ON	
APPLICATION		DO NOT SCALE DRAWING	
EZ-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		DESCRIPTION	
		BNC FEMALE (9230) ADAPTER TO STK BAN PLUGS (9260)	
SIZE	CODE IDENT NO.	DRAWING NO.	REV.
B	08505	1002	
SCALE	1:1		SHEET 1 OF 1