



SCALE DRAWING 1:1

LFB090050-000

SEE DETAIL "A" SECTION A-A  
Z vs. FREQUENCY  
1 TURN, 2, AND 3 TURNS  
(REF. ONLY)

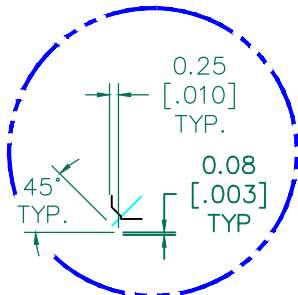

DETAIL "A"  
CHAMFER  
SCALE=5:1

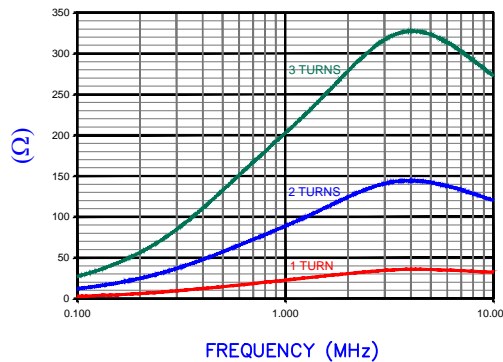

AGILENT E4991A RF Impedance/Material Analyzer  
HP 16092A Test Fixture REF# 2512

IMPEDANCE ( Z ) NET<sup>SEE NOTE 1</sup>

FREQUENCY	500 KHz	1 MHz	5 MHz
NOMINAL (REF.) 1 TURN	12 Ω	21 Ω	36 Ω
MINIMUM (SPEC.) 1 TURN	- Ω	17 Ω	- Ω
NOMINAL (REF.) 2 TURNS	58 Ω	90 Ω	140 Ω
NOMINAL (REF.) 3 TURNS	132 Ω	200 Ω	320 Ω

TEST CRITERIA

METER HP4396A OR EQUIVALENT  
FIXTURE HP16092A OR EQUIVALENT

**UNCONTROLLED DOCUMENT**

NOTES: UNLESS OTHERWISE SPECIFIED

- NET IMPEDANCE IS IMPEDANCE OF THE FERRITE CORE ONLY. ALL IMPEDANCE CONTRIBUTION FROM TEST WIRE AND FIXTURES HAS BEEN REMOVED.
- COSMETIC SPECIFICATION REFER TO WI-QA-038.

FERRITE CORE DIMENSIONS (SPEC):

A	9.00 [.354]	±	0.25 [.010]
B	5.00 [.197]	±	0.25 [.010]
C	7.00 [.275]	±	0.18 [.007]

WEIGHT/1000 1.04 kgs [2.29 Lbs]

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird		
E	UPDATE MATERIAL	05/26/10	Jcai	PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:
D	UPDATE COMPANY LOGO	07/09/08	TMB	LFB090050-000		E	FERRITE CORE	TMB
C	REMOVE MIN SPEC @ 500 KHz	02/10/06	TMB	DATE:	08/27/02	SCALE:	5:1	MATERIAL:
B	UPDATE TOLS. ON DIMENSIONS A,B&C ADD TEST REF TO CURVE	12/22/04	JRK	CAD #	LFB090050-000-E	TOOL #	B0354	Mn-Zn
A	ORIGINAL DRAFT	08/27/02	TMB					
REV	DESCRIPTION	DATE	INT					