



# INTERCONNECTS


## SERIES 351 • 2,54 GRID INTERCONNECT HEADERS • SINGLE ROW STRIPS

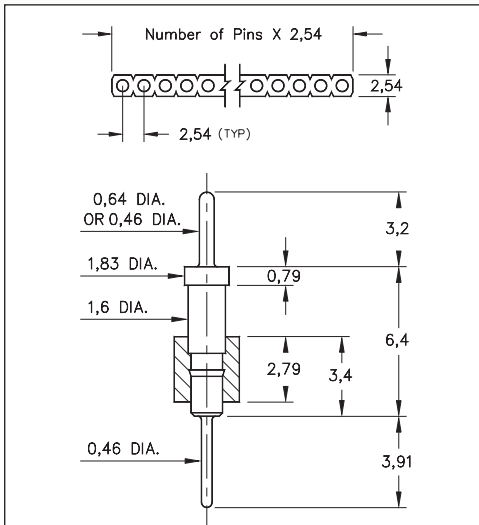

**FIG. 1**

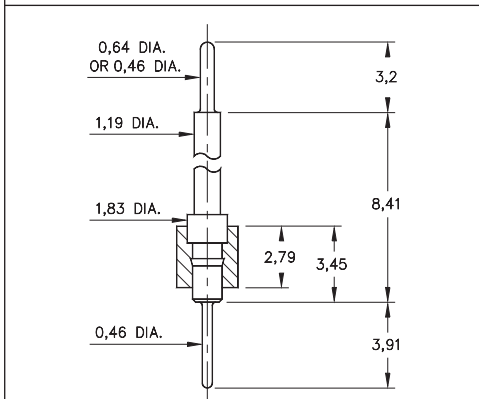

**FIG. 2**

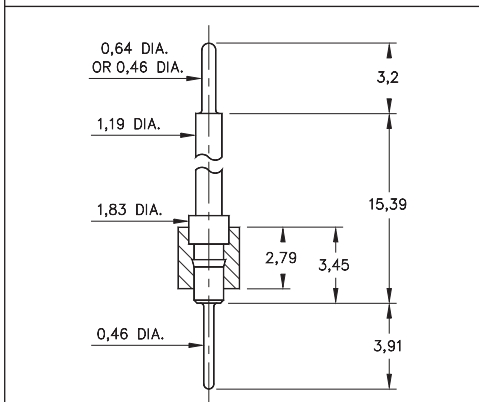

**FIG. 3**

- Series 351 interconnect header strips come in three lengths with 0,46 dia. pluggable solder tails at one end and 0,64 dia. pins at the other. Please see series:  
351...003 uses pin #5503  
351...004 uses pin #5504  
351...005 uses pin #5505
- 0,46 pluggable solder tails are available at both ends. Please see series:  
351...009 uses pin #5509  
351...010 uses pin #5510  
351...011 uses pin #5511  
See pages 212 and 214 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



### ORDERING INFORMATION

<b>FIG. 1</b>	<b>Series 351...003</b>	<b>0,46 / 0,64 Dia. Solder Tails</b>
	351-10-1	-00-003000 ↑ Specify number of pins 01-64
<b>FIG. 2</b>	<b>Series 351...009</b>	<b>0,46 / 0,46 Dia. Solder Tails</b>
	351-10-1	-00-009000 ↑ Specify number of pins 01-64
<b>FIG. 2</b>	<b>Series 351...004</b>	<b>0,46 / 0,64 Dia. Solder Tails</b>
	351-10-1	-00-004000 ↑ Specify number of pins 01-64
<b>FIG. 3</b>	<b>Series 351...010</b>	<b>0,46 / 0,46 Dia. Solder Tails</b>
	351-10-1	-00-010000 ↑ Specify number of pins 01-64
<b>FIG. 3</b>	<b>Series 351...005</b>	<b>0,46 / 0,64 Dia. Solder Tails</b>
	351-10-1	-00-005000 ↑ Specify number of pins 01-64
<b>FIG. 3</b>	<b>Series 351...011</b>	<b>0,46 / 0,46 Dia. Solder Tails</b>
	351-10-1	-00-011000 ↑ Specify number of pins 01-64



XX=Plating Code  
See Below

For  
Electrical, Mechanical  
& Environmental Data,  
See page 264

SPECIFY PLATING CODE XX=	10			
Pin Plating		0,25µm Au		