


Extended length is with 500g of force

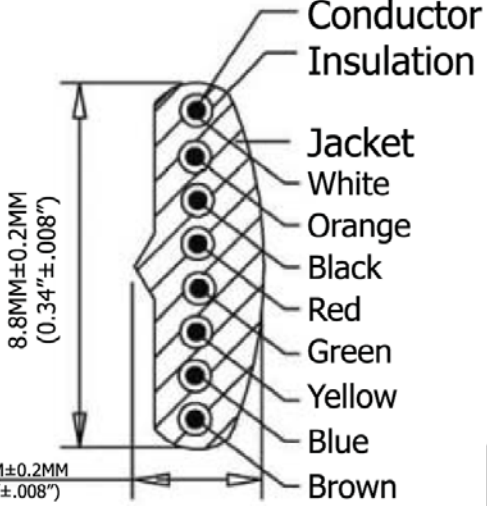

P1	P2
1	8
2	7
3	6
4	5
5	4
6	3
7	2
8	1

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	39.5 Inches
2,133.6MM-2,453.64MM	1,003.3MM

Materials:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[.014MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainde
 - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

Unit: MM

SEC: A=A



Scale	1:1						Name	Item No.
TOLERANCE							Chappell	AT-C-26-8/8/S-7
X.X	±0.40				Drawn	11.18.11		
X.XX	±0.25				Approved			Title
X.XXX	±0.15							NON-UL 26 AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Standard Plug, 50μ" of contact plating, Silver
Angle	±3°							Drawing No.
								rev00
								Replace
								Sheet

