

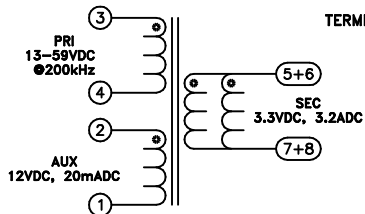


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


more than you expect

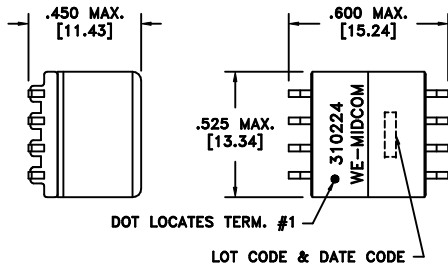

TERM. NO.'s FOR REF. ONLY



Customer to tie terminals 5+6 and 7+8 internally on PC Board.

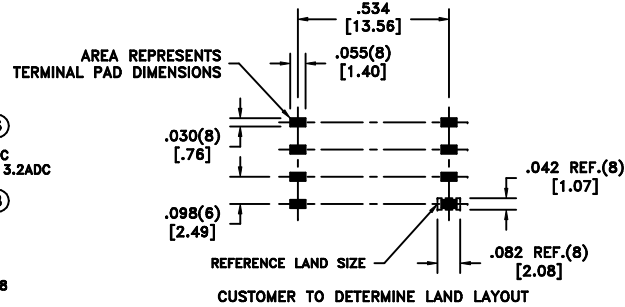

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-4 @20°C	0.105 ohms ±20%
D.C. RESISTANCE	2-1 @20°C	0.765 ohms ±20%
D.C. RESISTANCE	5-7 tie(5+6, 7+8), @20°C	0.006 ohms ±20%
INDUCTANCE	3-4 100kHz, 100mVAC, Ls	37uH ±10%
LEAKAGE INDUCTANCE	3-4 tie(5+6+7+8), 100kHz, 100mVAC, Ls	5uH max.
DIELECTRIC	3-5 tie(5+6), 1500VAC, 1 second	-
DIELECTRIC	3-2 500VDC, 1 second	-
TURNS RATIO	(3-4):(5-7), tie(5+6, 7+8)	5.25:1, ±3%
TURNS RATIO	(3-4):(2-1)	1.52:1, ±3%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0328 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750310224
6B	3/13		CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750310224	SPECIFICATION SHEET 1 OF 1
6A	2/08	SEE REVISION SHEET FOR	REVISION LEVEL			

