



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	-	E		REVISED PER ECO-13-015151	16DEC2013	FL	FY

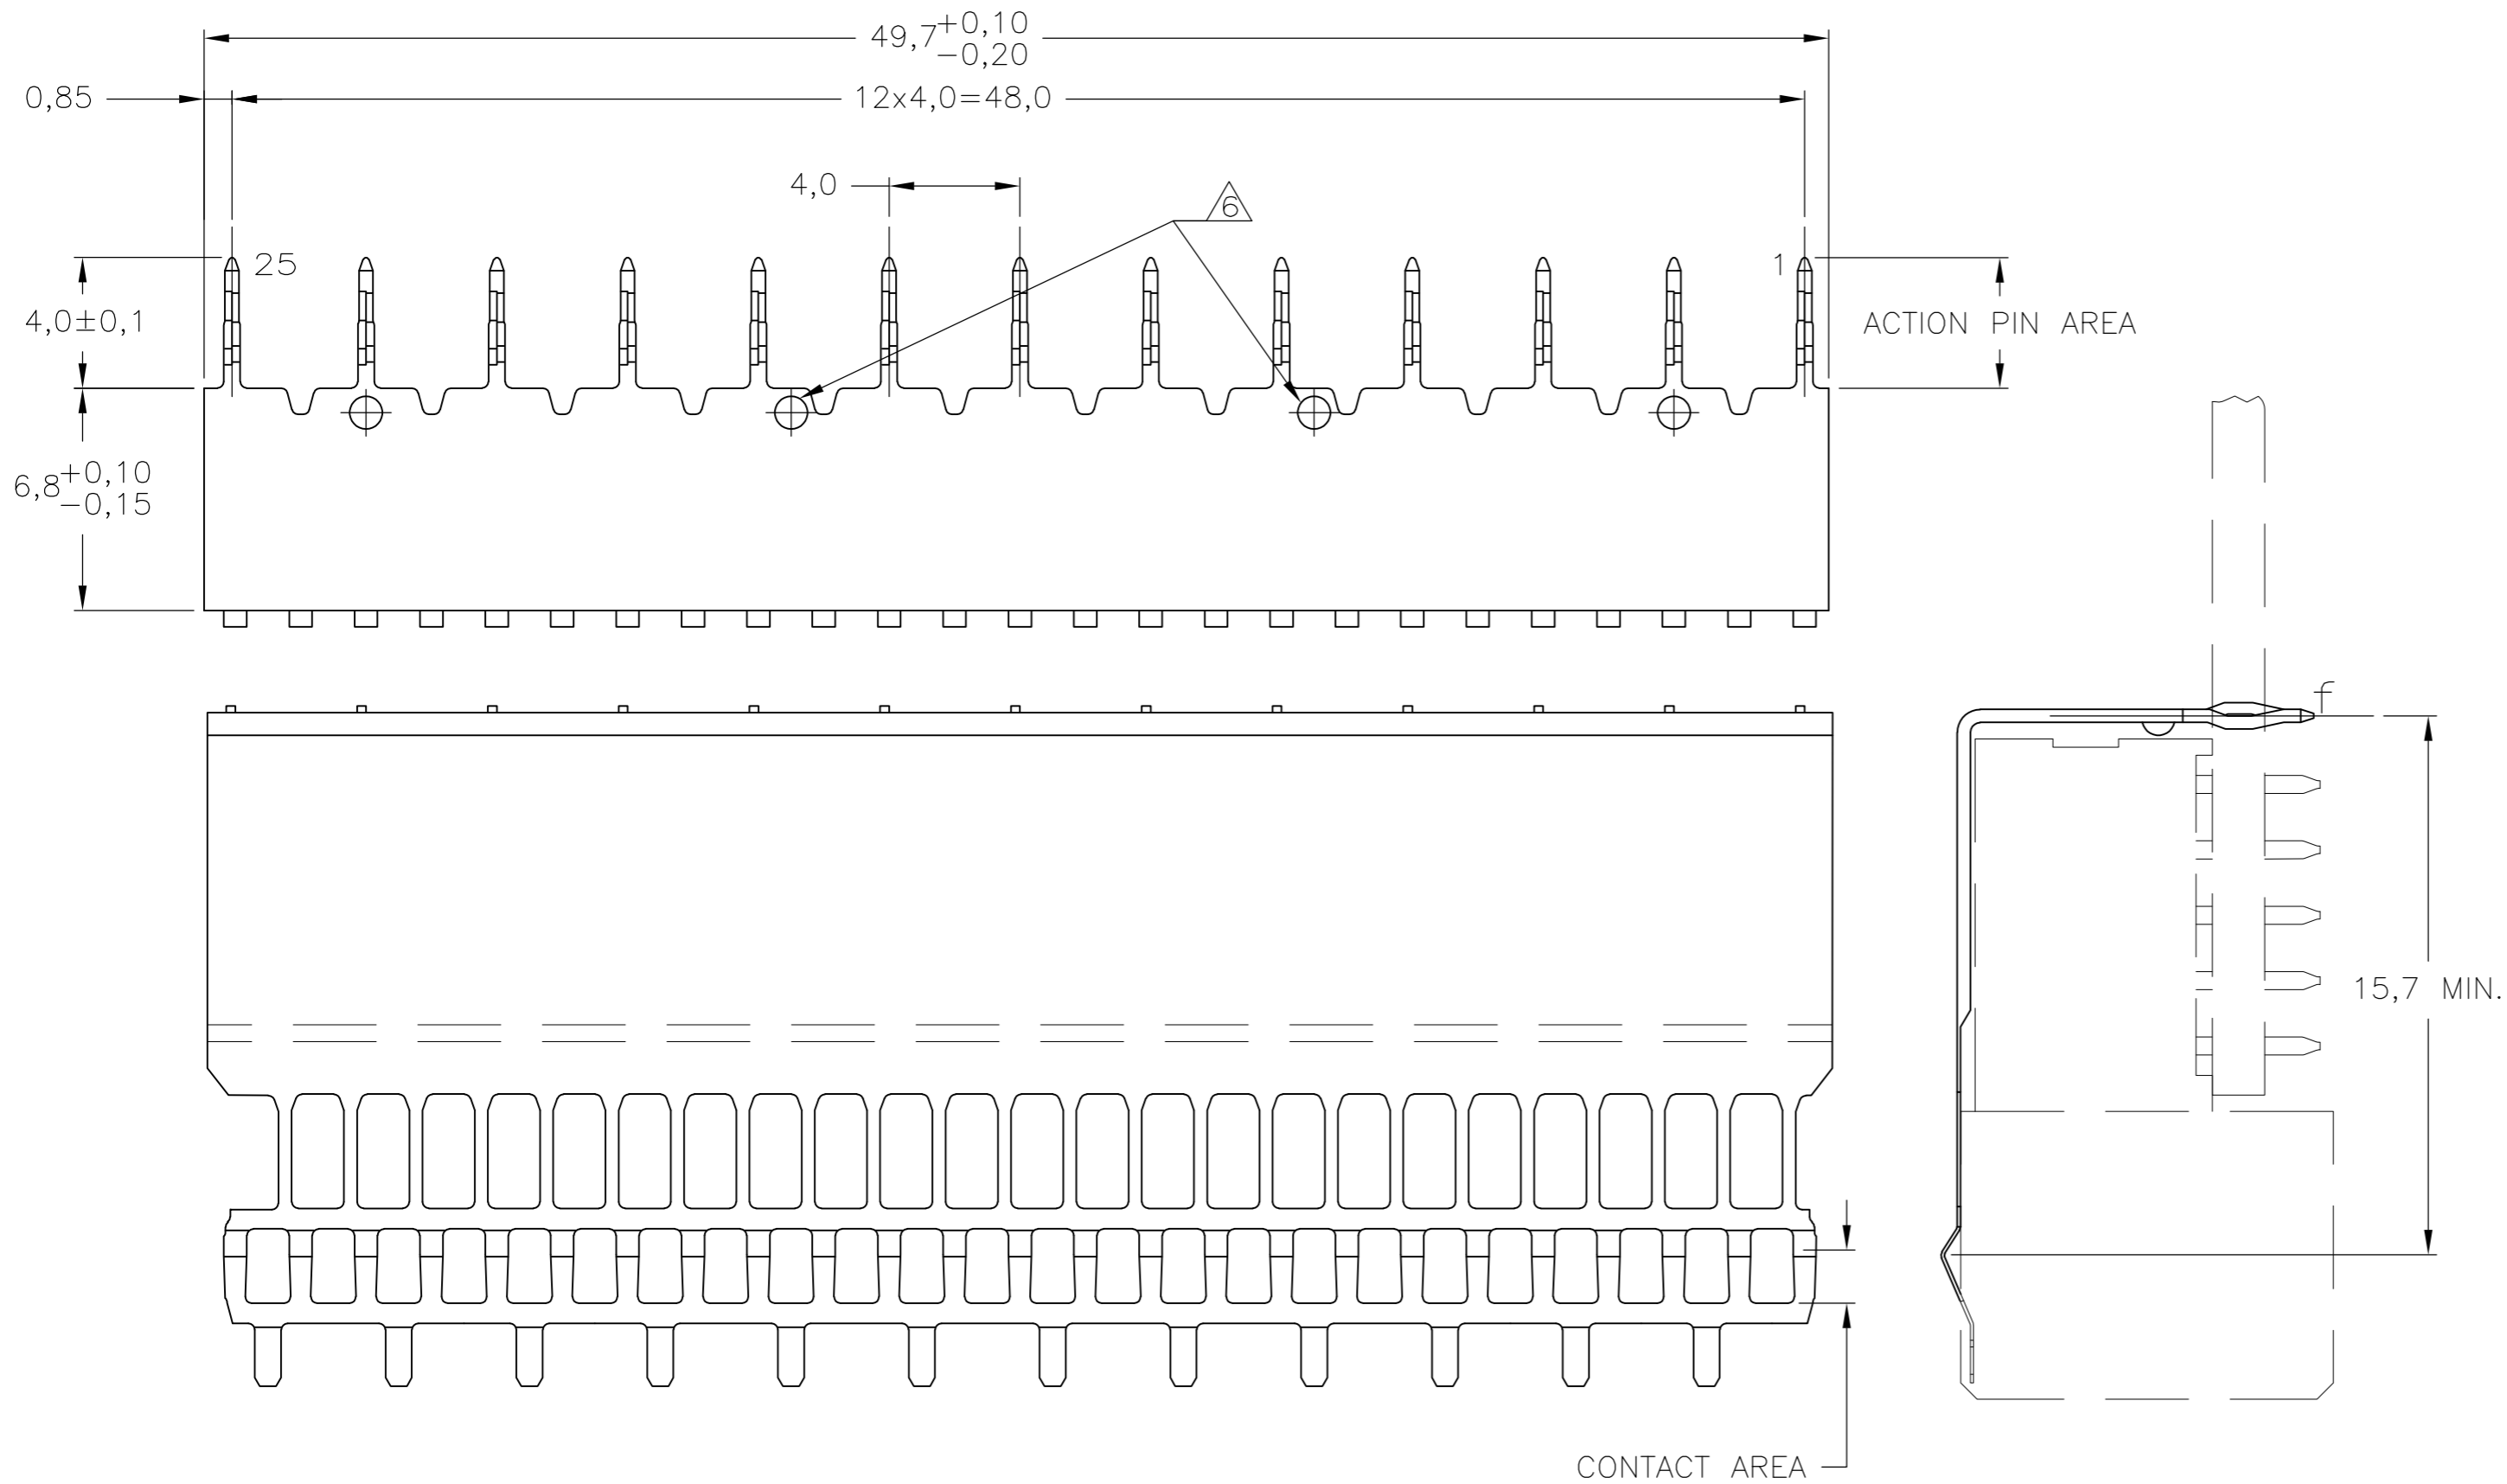

NOTES:

- ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- ⚠ MATERIAL; PHOSPHORBRONZE.
- ⚠ ROW "f" 13 PLATED THROUGH HOLES FOR UPERSHIELD
- ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-25 COLUMNS
- ⚠ 125 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- ⚠ OPTIONAL DIMPLES AT DISCRETION OF DIE ENGINEER.
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ⚠ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

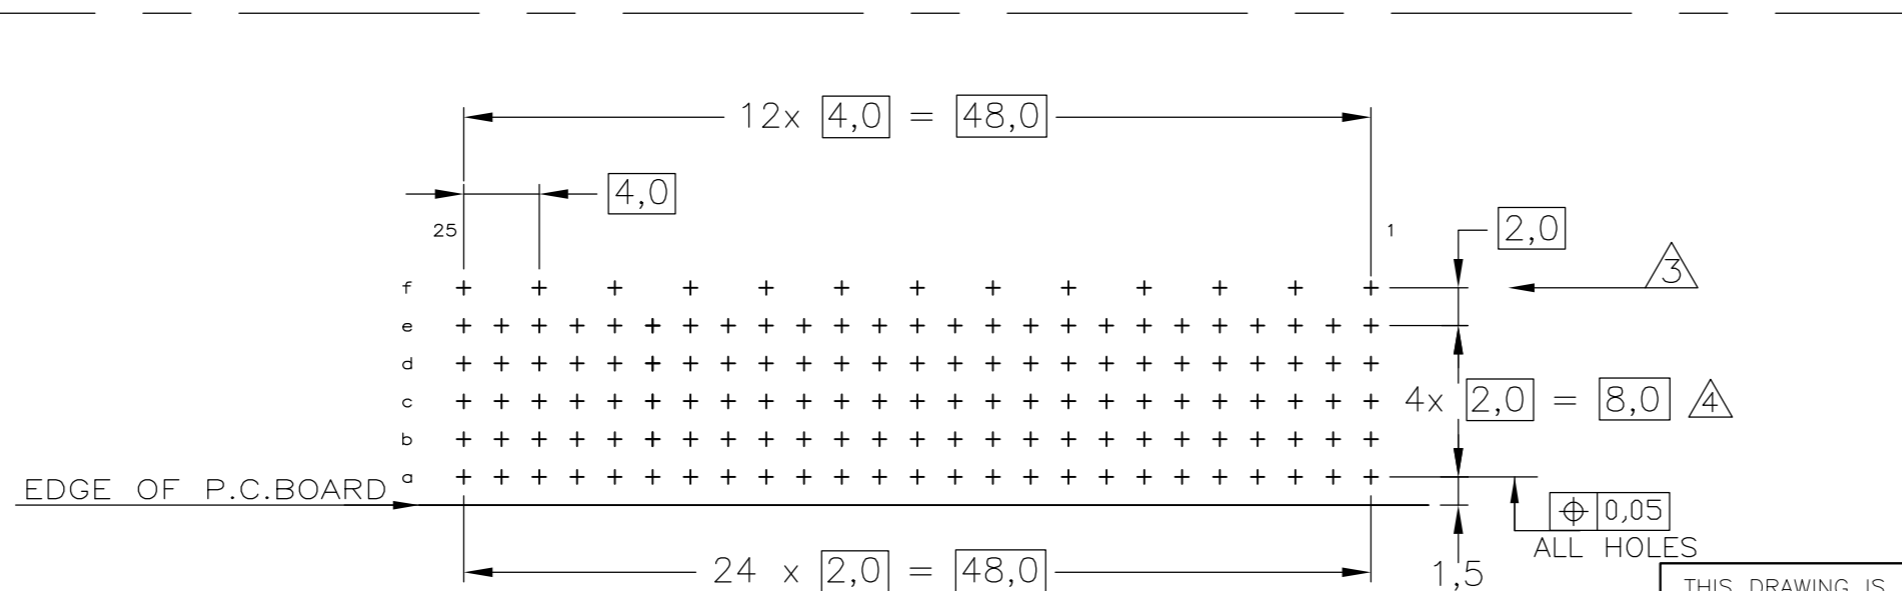

COMPONENT SIDE AS SHOWN  
 RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN  
 FOR DETAILS SEE  
 APPLICATION SPECIFICATION

FINISH	MATERIAL	PARTNUMBER
⚠ 8 11	⚠	8-5338109-4
⚠ 5 10	⚠	5338109-9
⚠ 8	⚠	5338109-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	K.N.KIRAN	13AUG04
CHK	B.MOOIJ	25MAR05
APVD	B.MOOIJ	25MAR05
PRODUCT SPEC	108-19082	
APPLICATION SPEC	114-19029	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

Z-PACK 2mm HM  
 GROUND RETURN UPPER SHIELD  
 TYPE B-25 COLUMNS

SIZE	A2	CAGE CODE	00779	DRAWING NO	C=5338109	RESTRICTED TO	-
SCALE	5:1	SHEET	1 of 1	REV	E		