

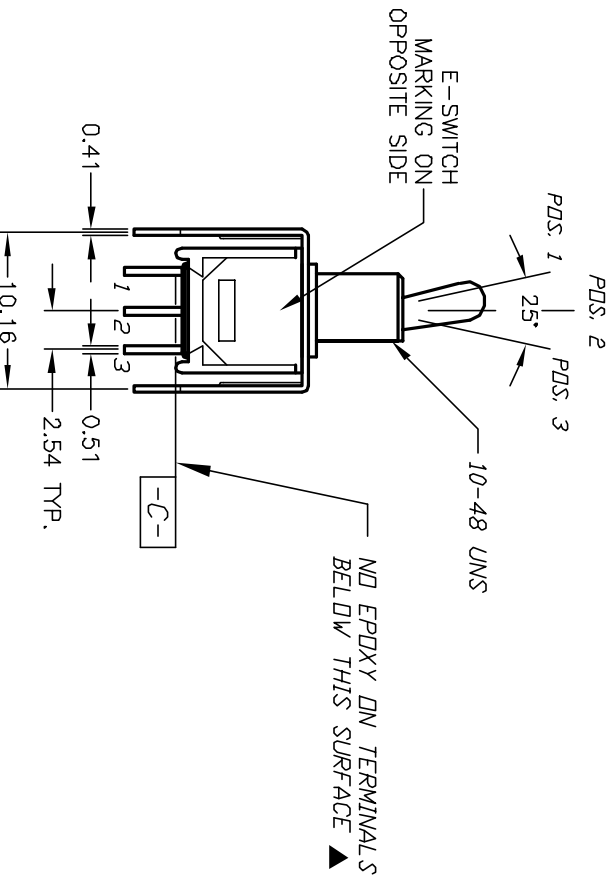


RECOMMENDED P.C.B. LAYOUT

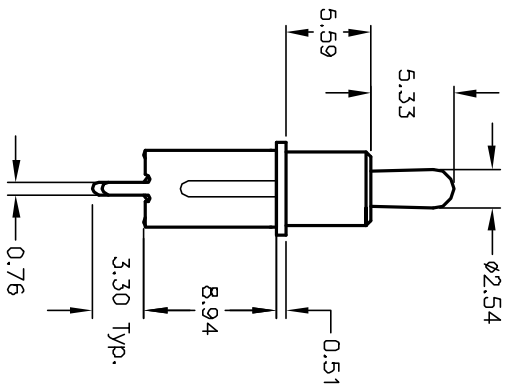

CIRCUIT: SPDT  
CONTACT CONFIGURATION

| SWITCH FUNCTION |        |        |  |
|-----------------|--------|--------|--|
| PDS. 1          | PDS. 2 | PDS. 3 |  |
| DN              | NONE   | DN     |  |
| 2-3             | OPEN   | 2-1    |  |

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. CONTACT RATING: 0.4 (VA) max. @20 VAC or DC max.
  5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/ Silver plate
  6. ELECTRIC LIFE: 30,000 make-and-break cycles  
at full load.
  7. INSULATION RESISTANCE: 1,000 M ohm min.
  8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
  9. OPERATING TEMP.: -30°C to 85°C
  10. ▲ DENOTES CRITICAL PARAMETER.

# E-SWITCH®

200MSP1T2B2VS2QE

| REV. | ECN No. | DESCRIPTION             | DATE    | CHKD |
|------|---------|-------------------------|---------|------|
| A    | 12978   | RELEASED FOR PRODUCTION | 3/28/03 | AR   |

| TITLE            | SCALE | DATE    | DR | DWG     | REV |
|------------------|-------|---------|----|---------|-----|
| 200MSP1T2B2VS2QE | 2:1   | 3/28/03 | AR | T211020 | A   |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED