

DG120 Series | ITE & Medical Safety

120W/200W Peak

- Built-in active PFC
- UL/CSA/EN 60950-1, 2nd edition (ITE)
ANSI/AMMI/CSA/EN 60601-1, 3rd ed. (Medical)
- Efficiency: $\geq 90\%$ typical
- Operation from -20°C to 70°C - convection
- Approved for 2xMOPP applications
- 10 year warranty



GREEN POWER

Description

The **DG120 (ITE)** and **DG120M (Medical) Series** is a 120 Watt Open Frame power supply that is 2" x 4" x 1.26" providing 11.9 Watts per cubic inch. Each unit has a built in Active Power Factor Correction and the efficiency of the series is between 90% to 91% depending on model. The DG120 is compliant with Green power, Energy Star ver. 6 and ErP EC 1275/2008. The Series is rated at 120 Watts free air convection and up to 150 Watts with 8CFM forced air.

Specifications

Input

Input Voltage	• 90 VAC to 264 VAC, 115/230V nominal
Input Frequency	• 47 Hz to 63 Hz
Inrush Current	• < 30/60A at 115/230VAC, cold start, 25°C
Power Factor	• >0.9
Input Protection	• Internal T3.15 A / 250 VAC fuse in line
No Load Input Power	• < 0.5W (< 1.5W for "A" version)
Input Current	• 2A max at 115 VAC/1A max at 230VAC

Output

Output Voltage	• See tables on page 2
Initial Set Accuracy	• See tables on page 2
Minimum Load	• No minimum load required
Start Up Rise Time	• 2 ms typical
Hold Up Time	• > 20 ms typical
Line Regulation	• $\pm 0.5\%$ typical
Load Regulation	• $\pm 1.0\%$ typical
Ripple & Noise	• < 1% pk-pk typical, 20MHz Bandwidth
Overvoltage Protection	• latch off
Overload Protection	• auto recovery
Short Circuit Protection	• auto recovery

Environmental

Operating Temperature	• -20°C to 70°C derating: 2.4% / $^{\circ}\text{C}$ > 45°C
Cooling	• 120W; free air convection 150W; 8CFM forced air
Operating Humidity	• 5-95% RH, non-condensing
Storage Temperature	• -40°C to $+85^{\circ}\text{C}$
Altitude	• 0 to 3000 m

General

Efficiency	• $\geq 90\%$ typical at rated load
Energy Saving	• Energy Star, Level V
Isolation	• 4000 VAC Input to Output, 2x MOPP 1500 VAC Input to Ground, 1x MOPP 1500 VDC Output to Ground, 1x MOPP
Isolation Resistance	• 50 M Ω
Switching Frequency	• 120 kHz typical
MTBF	• >TBD kWhrs to MIL-HDBK-217F at 50°C

EMC & Safety

Safety Approvals:	• UL/CSA/EN 60950-1, 2nd edition • ANSI/AMMI/CSA/EN 60601-1, 3rd edition • CB report, CE mark, RM report
Harmonic Currents	• EN 61000-3-2 class D
EMI	• EN55022 (CISPR 22) Class B, EN 61000-3-3
ESD Immunity	• EN 61000-4-2, 6kV/contact, 8kV/air
Radiated Immunity	• EN 61000-4-3, 10V/m with 80% AM
EFT Burst	• EN 61000-4-4, 2kV
Surge	• EN 61000-4-5, 1kV/L-L, 2kV/L-G
Conducted Immunity	• EN 61000-4-6, 10V with 80% AM
Magnetic Fields	• E61000-4-8, 10A/m
Dips & Interruptions	• EN 61000-4-11, 30% dips 10ms, 60% dips 100ms, 95% dips 5000ms

Warranty

Manufacturer's Warranty	• 10 years. Call Tri-Mag or go to www.Tri-Mag.com for details.
-------------------------	---

DG120 Series | ITE & Medical Safety

Output Specifications

Model No.	Application	Output Rail	Load				Initial Accuracy	Ripple Noise	Line Reg.	Load Reg.
			Min	Rated	Max	Peak				
DG120(M)-7 DG120(M)-7A	ITE/Medical	+12V	0A	10.0A	12.5A	16.7A	+11.9V~+12.1V	< 100mVpp	+ 0.5%	+ 1%
DG120(M)-8 DG120(M)-8A	ITE/Medical	+15V	0A	8.0A	10.0A	13.4A	+14.9V~+15.1V	< 100mVpp	+ 0.5%	+ 1%
DG120(M)-3 DG120(M)-3A	ITE/Medical	+18V	0A	6.6A	8.3A	11.1A	+17.9V~+18.1V	< 150mVpp	+ 0.5%	+ 1%
DG120(M)-9 DG120(M)-9A	ITE/Medical	+24V	0A	5.0A	6.3A	8.3A	+23.9V~+24.1V	< 150mVpp	+ 0.5%	+ 1%
DG120(M)-G DG120(M)-GA	ITE/Medical	+28V	0A	4.3A	5.4A	7.2A	+27.9V~+28.1V	< 150mVpp	+ 0.5%	+ 1%
DG120(M)-J DG120(M)-JA	ITE/Medical	+36V	0A	3.4A	4.2A	5.6A	+35.8V~+36.2V	< 200mVpp	+ 0.5%	+ 1%
DG120(M)-14 DG120(M)-14A	ITE/Medical	+48V	0A	2.5A	3.1A	4.2A	+47.8V~+48.2V	< 250mVpp	+ 0.5%	+ 1%

Notes


- Output Load:**
Convection cooling: 120W, forced-air cooling: 150W max
- Peak Load Duration:**
200W peak rating for durations up to 5 secs. Ideal for motor-starting/in-rush conditions.
- Engineering Specification:**
Contact Tri-Mag for full engineering specification for the specific part number used in your design application.
- Standby Power Consumption with System:**
This is required by ENERGY STAR in U.S. and ErP regulation in Europe for appliances such as computers and displays. The latest requirement is measured input power to be less than 0.5W with system.
- Audible Noise:**
For the DG120((M)-x energy saving series, achieving Level V (<0.5W) standby power consumption is accomplished through burst mode operation of the controller. The burst operation frequency is dependent on load conditions and is approx. 114Hz, within the audible frequency range.
- Step Efficiency and Average Efficiency:**
Test conditions in step efficiency are referred to 3.2.2 IPS (Internal Power Supply) of the ENERGY STAR program requirements for computers. ENERGY STAR required for efficiency @ 20%, 50%, 100% load is 84.5%, 89%, 86.5%; average efficiency is the average of step efficiency.
- Model Ordering Table:**

Safety/Application	w/o Audible Noise	Energy Saving
ITE	DG120-xA	DG120-x
Medical	DG120M-xA	DG120M-x

Mechanical Specifications

Notes

- Mechanical drawing dimensions in mm Tolerance: ± 0.4mm
- Size: 50.8 x 101.6 x 32.5 Max. (mm)
2.0 x 4.0 x 1.26 Max. (inches)
Net weight: 160 g approx. / unit
- Connections: AC Input: PCB Header: JST B2P3-VH or equivalent
Mating Connector: JST VAR-2, VHR-3N or equivalent
DC Output: PCB Header: JST B4P-VH or equivalent
Mating Connector: JST VHR-4N or equivalent
Terminal Block (optional)
Fan/Remote sense: PCB Header: Molex 22-04-1021 (5045-02A) or equivalent
Mating Connector: Molex 22-01-1022 (5051-02) or equivalent

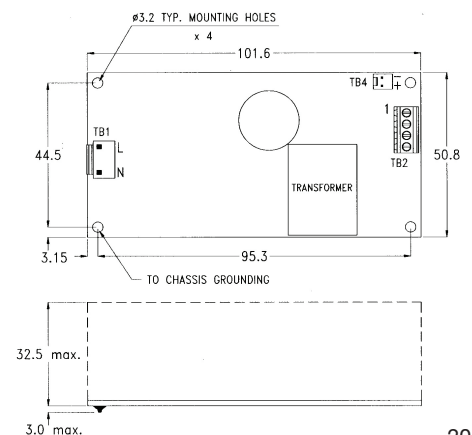

2014-10