


**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

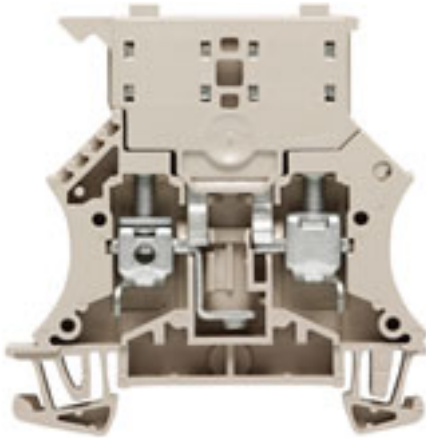

The fuse terminals of the Weidmüller W Series are available in two different forms:

- Fuse terminal with pivoting retaining lever
- Fuse terminal with plug-in SIHA fuse holder

General ordering data

Order No.	1011000000
Type	WSI 6
Version	W-series terminal with clamping yoke connection, Fuse terminal, Rated cross-section: 6 mm ² , Screw connection
EAN	4008190105624
Qty.	50 pc(s).

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Dimensions

Length	60 mm	Width	7.9 mm
Height	61 mm	Height of lowest version	62 mm
Weight	19.4 g		

Temperatures

Operating temperature	-50 °C...+120 °C	Storage temperature	
-----------------------	------------------	---------------------	--

CSA ratings data

Certificate No. (CSA)	200039-1057876	Voltage size B (CSA)	30 V
Voltage size C (CSA)	30 V	Voltage size D (CSA)	30 V
Current size B (CSA)	10 A	Current size C (CSA)	10 A
Current size D (CSA)	10 A	Wire cross section max. (CSA)	8 AWG
Wire cross section min. (CSA)	20 AWG		

UL ratings data

Certificate No. (UR)	E60693VOL1SEC38	Voltage size C (UR)	600 V
Current size C (UR)	9.5 A	Conductor size Factory wiring max. (UR)	8 AWG
Conductor size Factory wiring min. (UR)	20 AWG	Conductor size Field wiring max. (UR)	8 AWG

Material data

Material	Wemid	Colour	dark beige
Flammability class UL 94	V-0		

System specifications

Product family	W-series terminal with clamping yoke connection	Type of connection	Screw connection
Connection direction	on side	Number of levels	1
Number of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

Additional technical data

Explosion-tested version	No	Number of identical terminals	1
Open sides	right	Type of mounting	Snap-on

Conductors for clamping (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min. 0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. 6 mm ²
-----------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

Type of connection	Screw connection	Stripping length	12 mm
Blade size	4.0 x 0.8 mm	Connection direction	on side
Number of connections	2	Clamping range, rated connection, min.	0.5 mm ²
Clamping range, rated connection, max.	10 mm ²	Clamping screw	M 3.5
Tightening torque, min.	0.8 Nm	Tightening torque, max.	1.6 Nm
Torque setting with DMS electric screwdriver 3		Gauge to IEC 60947-1	A5
Conductor cross-section, solid, min.	0.5 mm ²	Wire connection cross section, solid core max. rated connection	10 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	10 mm ²
Wire connection cross section, finely stranded, max.	10 mm ²	Conductor cross-section, flexible, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	6 mm ²
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	6 mm ²
Wire connection cross section AWG, min.	AWG 20	Wire connection cross section AWG, max.	AWG 8

Display element

Operating voltage for display, max.	500 V	Type of voltage for indicator	AC/DC
-------------------------------------	-------	-------------------------------	-------

Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Display	Without LED
Fuse holder (cartridge holder)	Pivoting	Operating voltage, max.	500 V
Type of voltage for indicator	AC/DC		

Rating data

Rated cross-section	6 mm ²	Rated voltage to adjoining terminal	500 V
Rated impulse withstand voltage	6 kV	Rated current	6.3 A
Current at maximum wires	6.3 A	Standards	IEC 60947-7-3
Pollution severity	3		

Classifications

ETIM 2.0	EC000899	ETIM 3.0	EC000899
ETIM 4.0	EC000899	UNSPSC	30-21-18-11
eClass 4.1	27-14-11-16	eClass 5.1	27-14-11-16
eClass 6.0	27-14-11-16		

Approvals

Approvals	BURVER; CE; CSA; DET NORVER; GERMLLOYD; GOSTME25; KEMAKEUR; LLOYDSREG; MARITREG; NEMKO; RINA; UR
-----------	-----------------------------------------------------------------------------------------------------------------

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data**Product notes**

Note, ordering data	Max. power loss (1.6 W) at the cartridge fuse limits the rated current.
Note, technical data	Fuse inserts or contact sleeves should be attached in the middle; variant with contact sleeve order number 1028200000 (Qty. 50/11A) wire connection H07V-K10. H07V-R10 and AWG 8/7 with 1.4 Nm tightening torque
Note, accessories	Screw M3 x 5 order No. 1052100000 for QL 2 - QL 10.
Product description	400V

Downloads

STEP	1011000000_09406_WSI_6_STP.stp
3D model	

Datasheet

**W-series terminal with clamping yoke connection
WSI 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings

