

# C3225NP02E333J230AA

TDK Item Description : C3225NP02E333J\*\*\*\*



## Application & Main Feature

Commercial Grade ( Mid Voltage (100 to 630V) )

## Series

C3225 [EIA CC1210]



## Dimensions

L 3.20mm +/-0.4mm  
W 2.50mm +/-0.3mm  
T 2.30mm +/-0.2mm  
B 0.20mm Min.  
G

## Temperature Characteristic

NP0 (-55 to 150 degC 0+/-30ppm/degC)

## Rated Voltage

2E (250Vdc)

## Capacitance

33nF

## Capacitance Tolerance

J (+/-5%)

## Q Factor

1000 Min.


## Insulation Resistance

10Gohm Min.

## AEC-Q200

Not Applicable


### |Z|, ESR vs. Freq. Characteristics

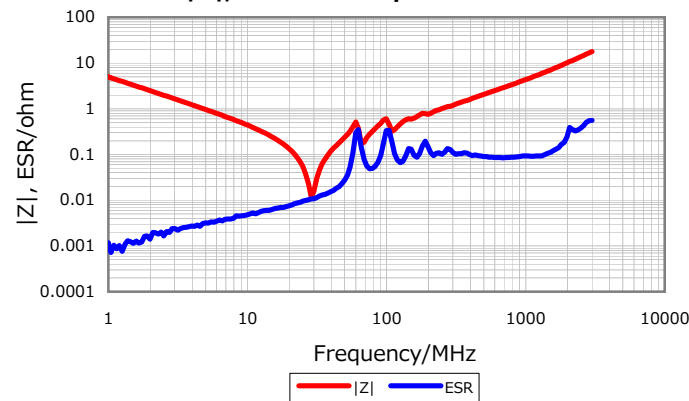


### DC Bias Characteristic



### Cap. vs. Freq. Characteristic

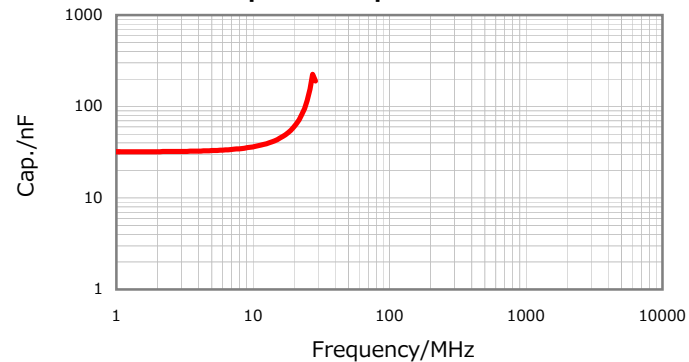

### Temperature Characteristics

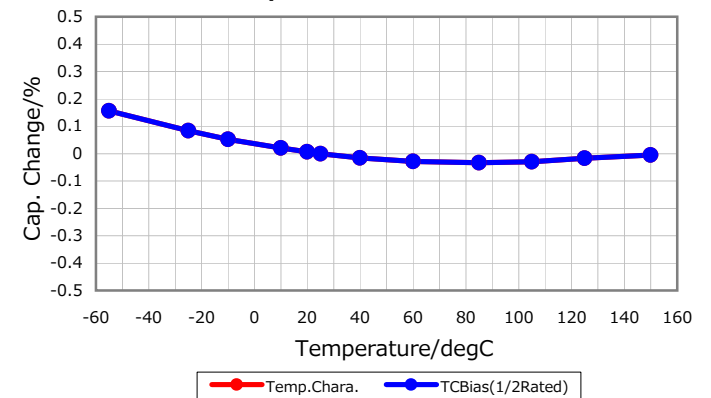

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

January 4, 2016