

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V3L-128

CQ-B2801

REPLACES X110125-V3L

RELEASE NO. PR-23069

CHECK

ISSUE 1

CATALOG LISTING
V3L-128
PAGE 1 OF 1

REVISIONS

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK



CHECK

CHECK

CHECK

CHECK

CHECK

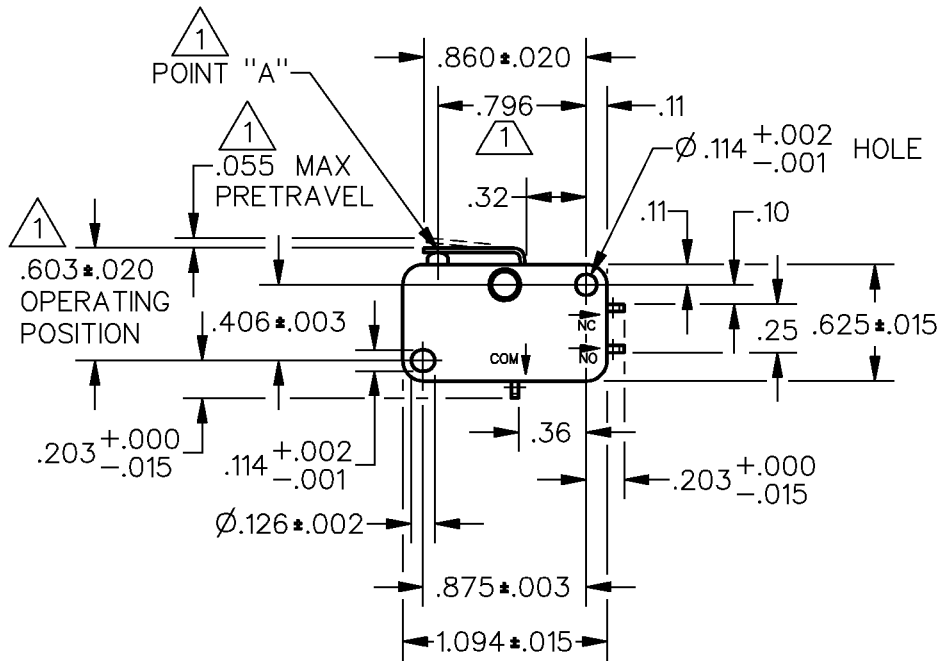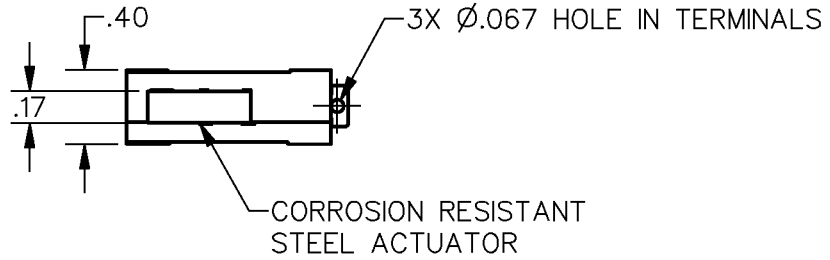


NOTES

- 1 CHARACTERISTICS MEASURED AT POINT "A"
- 2 - MAXIMUM MECHANICAL DEAD BREAK OF .0031 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION
- 3 - IN INSPECTION: DO NOT BURN OUT - GOLD CONTACTS
- 4 - IN INSPECTION: DO NOT EXCEED 10 VDC, .1A RESISTIVE LOAD
- 5 - RESTRICTED LISTING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE --- 181 GRAMS MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	ONE PLACE (.0) ±.030
RELEASE FORCE --- 20 GRAMS MIN	L22 1A 125 VAC		TWO PLACE (.00) ±.015
DIFFERENTIAL TRAVEL --- .012 MAX			THREE PLACE (.000) ±.005
OVERTRAVEL --- .032 MIN			ANGLES ±
RELEASE TRAVEL --- .007 MIN			WEIGHT



DDM/CAD
DRAWN

26 SEP 97

DCS