

#### General ordering data

Order No.	9507950000
Part designation	NexT 26/26/20 4gp 7032
Version	Ex enclosure, 205 mm, 260 mm, 260 mm, Sheet steel 1.5 mm (16 SWG)
EAN	4008190499471
Qty.	1 pc(s).

#### Dimensions

Fixing dimension, height	170 mm
Fixing dimension, width	316 mm
Height	205 mm
Length	260 mm
Width	260 mm

#### General details

Cover fixing	Removable cover + M6 screws
Enclosure fixing	Outside mounting with 10 mm holes
Integral fixing	4 x 10 mm spacers
Sealing material	Chloroprene (cover & flange)
Version cover	closed
Colour	RAL 7032 - pebble grey
Surface finish	RAL 7032, textured
Class of protection to EN 60529	IP 66
Weight	6,000 g
Ambient temperature, min.	-40 °C
Ambient temperature, max.	85 °C

#### Screwed cable glands top/bottom

M 12	57
M 16	40
M 20	26
M 25	15
M 32	8
M 40	6

#### Screwed cable glands top/bottom


M 50	2
M 63	2
M 75	1
Side of enclosure	Top / Bottom

#### Screwed cable glands, left/right

M12	27
M16	20
M20	12
M25	9
M32	4
M40	4
M50	1
M63	1
M75	1
On housing side	left / right

#### Approvals

Approvals institutes

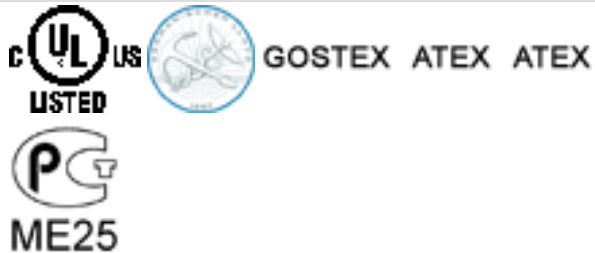

#### Classifications

ETIM 2.0	EC000049
ETIM 3.0	EC000049
eClass 4.1	27-14-12-06
eClass 5.0	27-18-05-02
eClass 5.1	27-18-05-02

#### Similar products

Order No.	Part designation	Version
9523660000	NexT 26/26/20 0gp 7032	Ex enclosure, 205 mm, 260 mm, 260 mm, Sheet steel 1.5 mm (16 SWG)
9523520000	NexT 26/26/20 0gp ss	Ex enclosure, 205 mm, 260 mm, 260 mm, Stainless steel 1.4404
9522960000	NexT 26/26/20 1gp 7032	Ex enclosure, 205 mm, 260 mm, 260 mm, Sheet steel 1.5 mm (16 SWG)
9522680000	NexT 26/26/20 1gp ss	Ex enclosure, 205 mm, 260 mm, 260 mm, Stainless steel 1.4404
9507880000	NexT 26/26/20 2gp 7032	Ex enclosure, 205 mm, 260 mm, 260 mm, Sheet steel 1.5 mm (16 SWG)
9508690000	NexT 26/26/20 2gp ss	Ex enclosure, 205 mm, 260 mm, 260 mm, Stainless steel 1.4404
9523100000	NexT 26/26/20 3gp 7032	Ex enclosure, 205 mm, 260 mm, 260 mm, Sheet steel 1.5 mm (16 SWG)

9522820000	NexT 26/26/20 3gp ss	Ex enclosure, 205 mm, 260 mm, 260 mm, Stainless steel 1.4404
9508760000	NexT 26/26/20 4gp ss	Ex enclosure, 205 mm, 260 mm, 260 mm, Stainless steel 1.4404