



Ha-VIS preLink®
HIFF RJ45 AP Box

Advantages

- Flexible, suitable for on-wall mounting or for top-hat mounting rail (35 mm)
- Economical, time-saving installation due to the use of pre-assembled data cables with Ha-VIS preLink® termination
- Robust design, powder-coated steel plate housing
- Structured cabling for industrial premises

Technical characteristics


Number of ports, Copper / Termination	2 / RJ45 jack HIFF
Transmission performance	Category 6 / Class E _A up to 500 MHz acc. to ISO/IEC 11 801:2002, EN 50 173-1
Transmission rate	up to 10 Gbit/s
Shielding	Fully shielded, 360° shielding contact
Cable diameter	5 mm ... 9 mm
Mounting	on-wall or DIN Rail
Dimensions (WxHxD)	60 x 81 x 70 mm
Degree of protection	IP20
Operating temperature	-40 °C ... +70 °C
Housing material	steel plate
Colour	Anthracite grey (RAL 7016)

Identification	Part number	Drawing	Dimensions in mm
----------------	-------------	---------	------------------

Ha-VIS preLink®
HIFF RJ45 AP Box

- RJ45 wall-mounted box consisting of:
- 1x steel-plate housing, 2-parts
 - 2x Ha-VIS preLink® Set, RJ45 jack HIFF, AWG 22/23
 - 2x grommet with membrane
 - 1x assembly instruction

20 82 101 0220

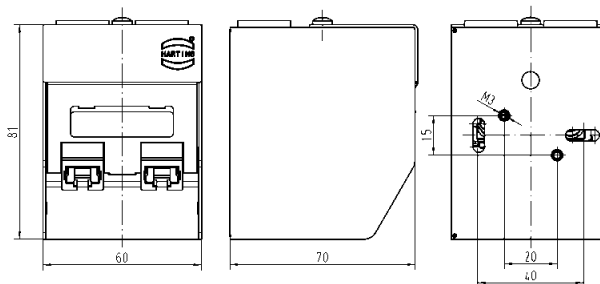

Accessory

DIN Rail mounting bracket

20 80 000 0003

