

## SIM S7/300 FB4\*10 2.5M

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

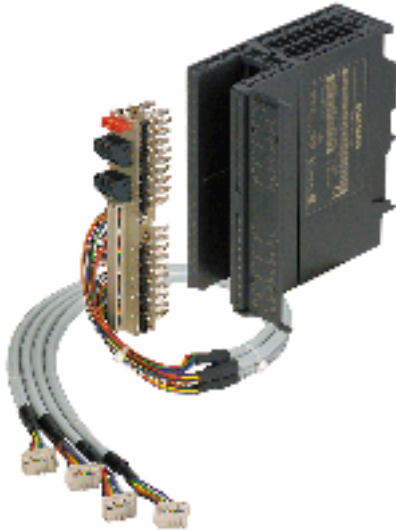

The front-panel adapter can be quickly and securely connected to SIEMENS S7 300/400 I/O modules. They offer inexpensive coupling of active and passive interface modules.

- Pre-assembled control cable, 4 x 10 or 1 x 40 poles
- Separate feeding of supply voltage via screw connection terminals
- Isolation of potentials via plug-in cross-connectors.

### General ordering data

Type	SIM S7/300 FB4*10 2.5M
Order No.	<a href="#">8433310250</a>
Version	Siemens S7-300, 40 P
GTIN (EAN)	4008190059941
Qty.	1 pc(s).

## SIM S7/300 FB4\*10 2.5M

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Length	2,500 mm	Net weight	685 g
--------	----------	------------	-------

### Temperatures

Operating temperature	Storage temperature	-40...+70 °C
-----------------------	---------------------	--------------

### General properties

Length	2,500 mm	Cable	Cable LiYY
Material	PVC	Rated cross-section	0.14 mm <sup>2</sup>
Resistance	55 mΩ/m		

### Connection data

Connection (field side)	4 x plug-in connectors according to IEC 603-1 / DIN 41651 10p	Connection to PLC	Siemens S7-300
Connection to the card	6ES7 321-1BL00-OAA0, 6ES7 323-1BL00-OAA0, 6ES7 322-1BL00-OAA0	Supply plug-in connectors	LM 3.5mm
Supply voltage	60 V AC / 75 V DC		

### Ratings data

Operating voltage	60 V AC / 75 V DC	Max. current per channel	1 A
-------------------	-------------------	--------------------------	-----

### Supply connection

Type of connection	Screw connection	Clamping range, min.	0.08 mm <sup>2</sup>
Clamping range, max.	2.08 mm <sup>2</sup>	Solid, min. H05(07) V-U	0.5 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>	Flexible, min. H05(07) V-K	0.5 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>	Wire cross-section, min. AWG	AWG 28
Wire cross-section, max. AWG	AWG 14		

### Classifications

ETIM 3.0	EC000237	UNSPSC	26-12-16-03
eClass 5.1	27-24-22-14	eClass 6.2	27-24-92-05
eClass 7.1	27-24-92-05		

### Approvals

Approvals



ROHS Conform

### Downloads

Declaration of Conformity [K370\\_11\\_10.pdf](#)