

Input Parameters

RATED INPUT VOLTAGE RANGE	100 - 240V AC
INPUT FREQUENCY	47- 63Hz
RATED INPUT CURRENT	1.5A
INRUSH CURRENT (132/264VAC)	25/50 (COLD START)

Outputs
Output Parameters

Models		
Model	Output Voltage (V)	Output Current (A)
KPS5-3R3	3.3	1.25
KPS5-5	5.0	1.00
KPS5-12	12.0	0.42
KPS5-15	15.0	0.33
KPS5-24	24.0	0.23
KPS10-3R3	3.3	2.50
KPS10-5	5.0	2.00
KPS10-12	12.0	0.84
KPS10-15	15.0	0.67
KPS10-24	24.0	0.42
KPS15-3R3	3.3	3.00
KPS15-5	5.0	3.00
KPS15-12	12.0	1.25
KPS15-15	15.0	1.00
KPS15-24	24.0	0.63

Output Limitations

Adjusting output voltage beyond the stated range may cause the overvoltage protection (OVP) to operate, whereby the output will cycle on and off or latch off. To reset for normal operation simply adjust the potentiometer to reduce the output voltage to within its range or cycle the input off then on if the unit has latched off.

Important safety instructions
Servicing

These products are not customer serviceable. Repairs may only be carried out by Lambda UK or their authorised agents. These products are not authorised for use as critical components in nuclear control systems, life support systems or equipment for use in hazardous environments without the express written approval of the Managing Director of Coutant Lambda Ltd.

Approval Limitations: Use in North America (AC units only)

When this product is used on 180VAC-250VAC mains with no neutral, connect the two live wires to L(live) and N (neutral) terminals on the input connector. In this instance double pole fusing is required.

High Voltage Warning

Dangerous voltages present within the power supply. The professional installer must protect service personnel from inadvertent contact with these dangerous voltages in the end equipment.

Safety Class of Protection

These products are designed for the following parameters : Material Group IIIa, Pollution Degree 2, Overvoltage Category II, Class II, Indoor use as part of an overall equipment such that the product is accessible to service engineers only.

Safety approvals

UL60950 and CSA 60950 EN60950,Class II and CE (LVD) mark.

Conducted and Radiated EMI

EN55022-B, FCC Class B
Immunity
EN61000-4-2,EN61000-4-3,EN6100-4-4,EN61000-4-6, EN61000-4-8

Environmental parameters
Operation

Temperature: 0 to +70°C (>40°C -70°C derate at 2.5%/°C)
Humidity: 10 to 95% RH, non-condensing

Storage and Transportation

Temperature: -20°C to +85°C
Humidity: 10% to 95% RH, non-condensing

Shock

<196.1 m/s² (20G)

Vibration

23.52 m/s² (10-55Hz): constant sweep 1 min X , Y, Z for one hour)

Cooling




Convection

Level of insulation

Dielectric Strength testing is carried out as follows:
Primary mains circuit to earth - 1.5kVAC.Primary mains circuits to secondary -3kVAC.
Outputs to each other and to earth are isolated to 500VAC.

Fuse Information

Internal fuse (F1): T2.2AL, 250V

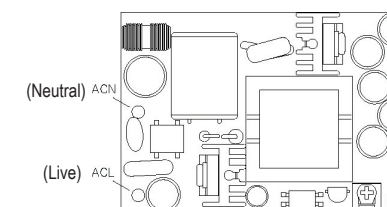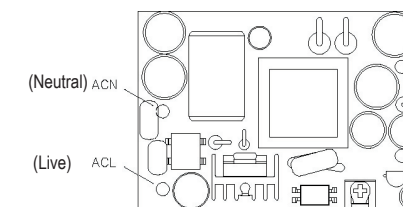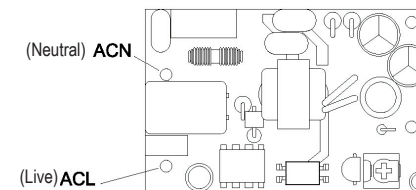Input Connector

General installation instructions

The ZP family of component power supplies is designed for use within other equipment or enclosures which restrict access to authorised competent personnel only. For safe installation and operation of this product, carefully follow the instructions listed below.

- i) These products are supplied open frame
- ii) These products are Class II and must be installed in accordance with Class II requirements of IEC/EN/UL/CSAC60950.
- iii) These products are IPX0, and therefore chemicals/solvents, cleaning agents and other liquids must not be used.

KPS5 Outline Drawing




KPS10 Outline Drawing

KPS15 Outline Drawing

All Dimensions are in inches[mm]
Tolerances: $.XX \pm .02$ [$.X \pm .5$] unless otherwise

All Dimensions are in inches[mm]
Tolerances: $.XX \pm .02$ [$.XX \pm .5$] unless otherwise noted

All Dimensions are in inches[mm]
Tolerances: $.XX \pm .02$ [$.XX \pm .5$] unless otherwise noted

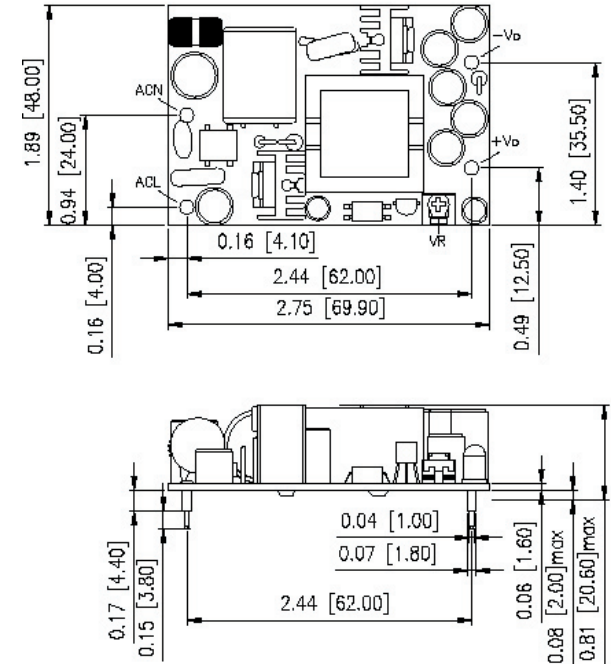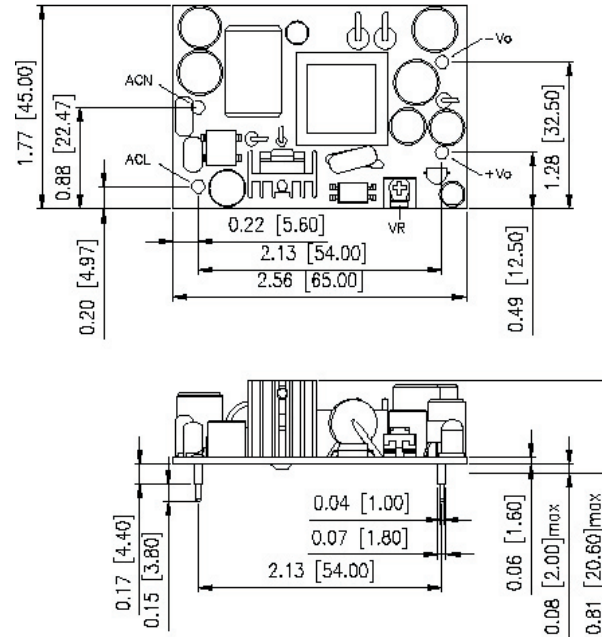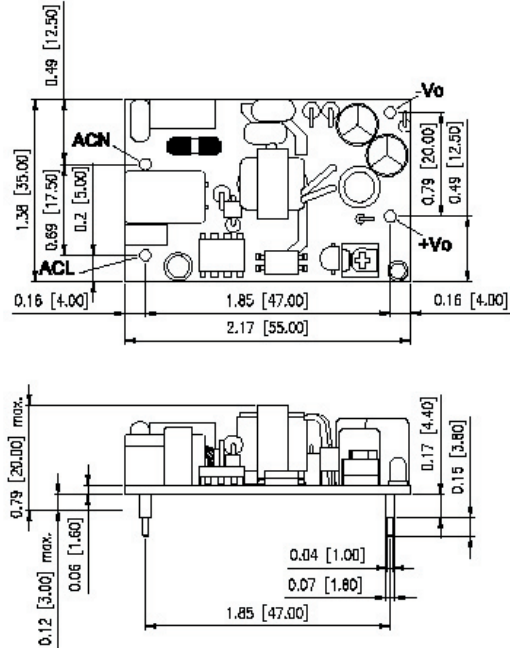

CEL Part No. 17165 Issue 02, February 2007



Coutant Lambda Limited,
Kingsley Avenue,
Ilfracombe,
Devon, EX34 8ES.
Telephone - Sales and Service (01271) 856666.
Head Office and Works (01271) 856600.
Facsimile (01271) 864894.
WEBSITE: www.lambda-gb.com