
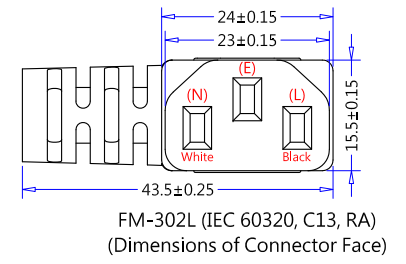
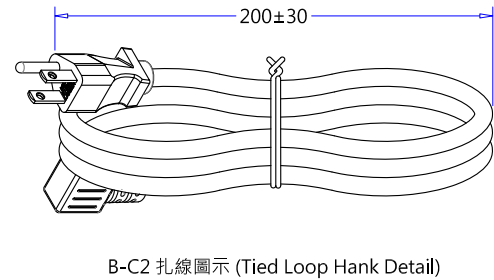
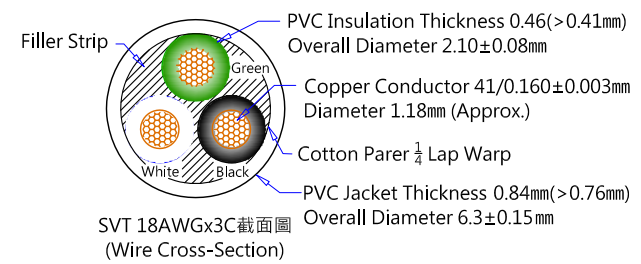



插頭部件 (Plug Component)			頭部剝皮尺寸 (Dimensions)			線材規格 (Wire Styles)		尾部剝皮尺寸 (Dimensions)			尾插部件 (Connector Component)		
顏色(Color)	零件描述(Component)	Qty.	內剝(Strip)	外剝(ROJ)	顏色(Color)	SVT 18AWGx3C		外剝(R.O.J)	內剝(Strip)	顏色(Color)	規格描述(Instruction)	Qty.	顏色(Color)
35P 黑色 (Black)	ME-301 (NEMA 5-15P)	1	6 ⁺¹ ₋₀	22 ± 2	黑/Black(L)	105°C 黑色 (BLACK)		16 ± 1	5 ⁺¹ ₋₀	黑/Black(L)	FM-302L (IEC 60320, C13)	1	35P 黑色 (Black)
鍍鎳 (Nickel-Plated)	φ4.75 圓管端子 (Earth Pins Terminal)	1	6 ⁺¹ ₋₀	22 ± 2	白/White(N)	Length : 2000±50 (79"±2")		16 ± 1	5 ⁺¹ ₋₀	白/White(N)	2.0*4.0 方管端子 (2.0*4.0 Receptacle Terminal)	3	銅本色 (Brass-Natural)
鍍鎳 (Nickel-Plated)	6.3*1.5 單片圓頭端子 (Solid Blades)	2	6 ⁺¹ ₋₀	22 ± 2	綠/Green(E)			16 ± 1	5 ⁺¹ ₋₀	綠/Green(E)	GA005-5 兩件式內模 (2.0*4.0 Serial Housing)	1	米白色 (Off-White)
黑色 (Black)	301-1 兩件式內模 (301-1 Inner Body)	1											

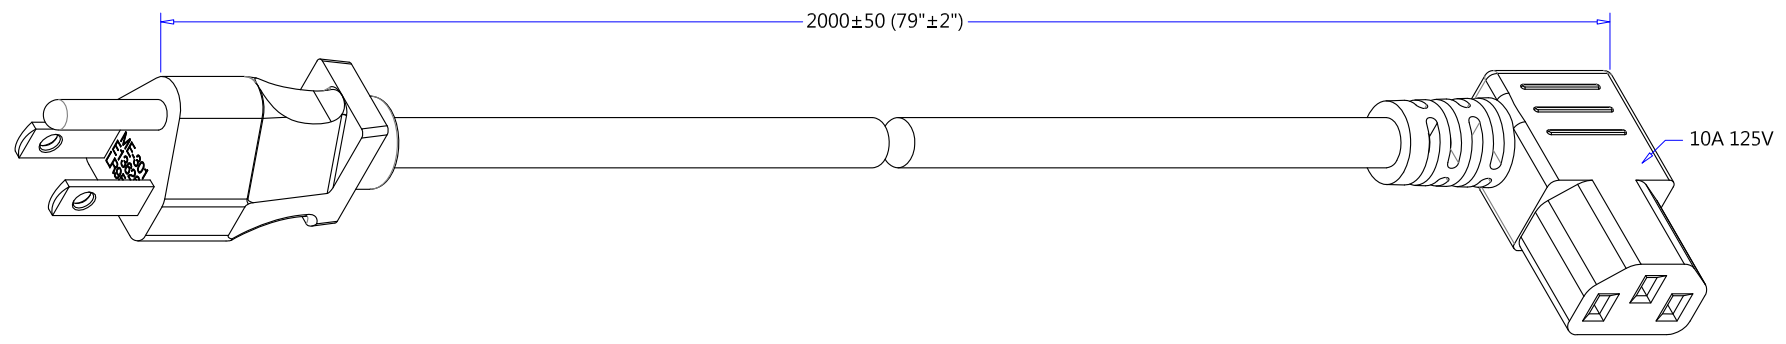

REV	DATE	REVISE CONTENT
A	08/29-2012	The first edition is issued and drawing.
F		

- NOTE:**
- Hi-Pot Test : 1500V/1Sec ; <0.5mA.
 - Insulation Resistance Test : DC 500/min>100 meg-ohm.
 - Continuity & Polarization Test : No short circuit, break circuit, displacement.
 - Each end terminal shall be capable of withstanding a pull of 25lbs for 1 minutes without loosening.
 - Strain relief shall be capable of withstanding a pull of 35lbs for 1 minutes without loosening.
 - All material according to Non-toxic standard.(Material must be RoHS compliant.)
 - "FMC" logo maybe present on C13.

線材印字 (Wire Printed)		充麻, 油墨印字 (Fillers, Printing Ink)		CnC Tech, LLC			
包裝方式 (Packing)		DRAWN		Industrial Cable and Connector Technology			
Tied Hank	See Hank Detail	Chu8.		CUSTOMER		CnC	
Carton Size	480 x 320 x 180	DATE		P/N No.		800-18-1-2-SVT0-BL-00200	
Pack Number	75pcs/ UL Laster Labels	08/29-2012		MATERIAL		PVC	UNIT
Carton Print	See Purchase Order	TYPE		Customer Approval		mm	
DRAWING NO.	098MM978	REV	A				

業務校閱 :
品質校閱 :