



**P1**

**P2**

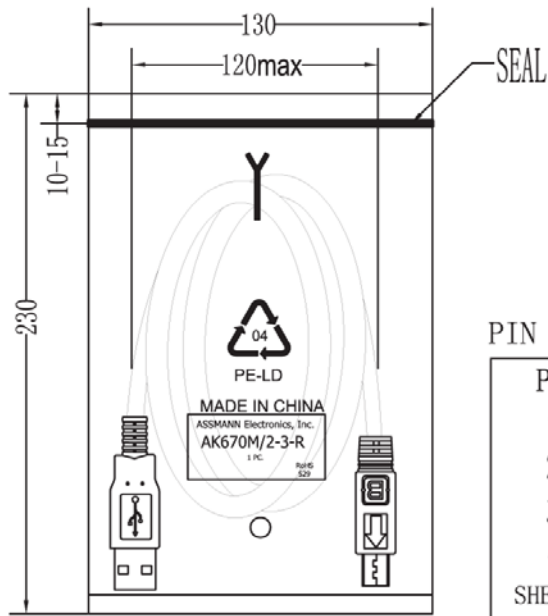

1PC/PE BAG

PIN ASSIGNMENT:

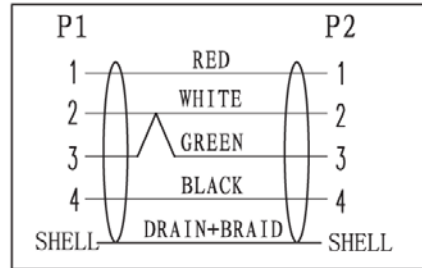

**Material:**

- Cable: USB2.0 Black UL2725 #28/1P+28#/2C+AEB
    - OD 3.8MM
    - White print
    - USB Cable E189529 AWM 2725 VW-1 30V 80°C 28AWG/1PR and 28AWG/2C
  - P1 Connector: Mini USB 4P B/M plug
    - Solder type
    - Plastic Black
  - P2 Connector: USB A Male
    - Shell: Nickel
    - Pin: G/F 4PCS type
    - Insulator color: White
  - Outer Jacket: Black PVC-40P
- Electrical:**
- 100% short, open, miswire test
  - Conduct resistance: 2Ω (Max.)
  - Insulation resistance: 10MΩ (Min.)
  - Dielectric test: 300V DC

Unit: MM



Scale	1:1						Name	Item No.
TOLERANCE						Drawn	08.29.11	<b>AK670M/2-2</b>
X.X	±0.40					Approved	Chappell	
X.XX	±0.25							Title
X.XXX	±0.15							USB 2.0 Cable A Male to Mini B Male - 4 Pin, Black, 2 Meters
Angle	±3°							Drawing No.
								<b>rev00</b>
								Replace
								Sheet
			Modification	Date	Name			

