


A

A

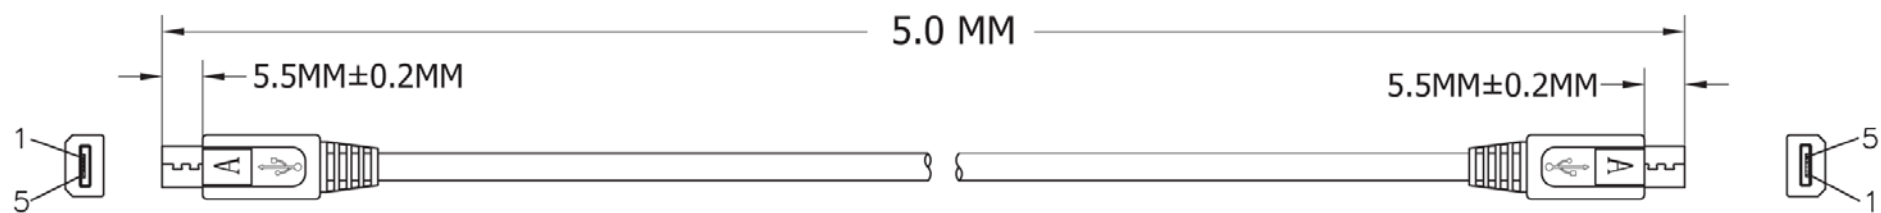


B

B

P1





P2



C

C

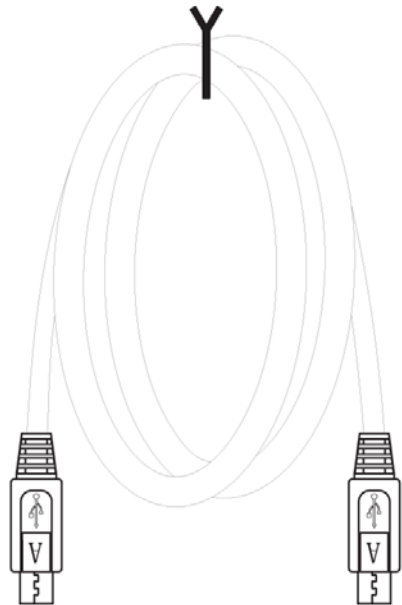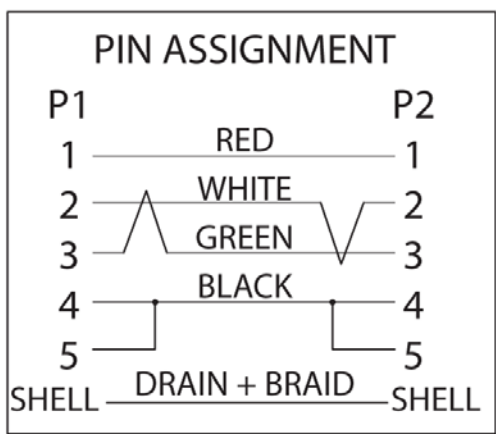

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL:)*1P+ 28AWG(7/0.12TC)*2C]+AEB(488 TC)
 - Jacket: Black
 - OD: 3.5MM
- Connectors: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-50P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC

D

D

E

E

F

F

G

G

Scale	1:1						Name	Item No.
TOLERANCE						Drawn	10.19.11	AK67301-5
X.X	±0.40					Approved		
X.XX	±0.25							Title
X.XXX	±0.15							USB2.0 Micro Connection Cable, 5 Meters USB A Micro Male <=> USB A Micro Male
Angle	±3°							Drawing No.
								rev00
								Replace
								Sheet
		Modification	Date	Name				



H

H