



RECOMMENDED PANEL MOUNTING

NOT TO SCALE

PANEL THICKNESS	X
0.75-1.25 (.030-.049)	19.2 (.756)
1.25-2.0 (.049-.079)	19.4 (.764)

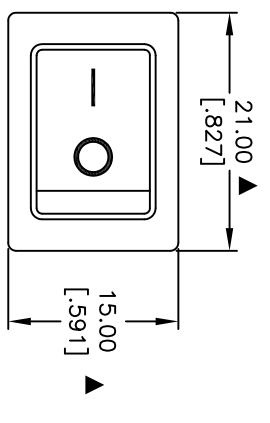

MARKING "F"




CIRCUIT: DPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X:X=±0.4
X:XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: cRUus 8A125/250VAC
5. MECHANICAL LIFE: 15,000 cycles
6. ELECTRICAL LIFE: 10,000 cycles
7. CONTACT RESISTANCE: 10mILLI-Ohms
8. INSULATION RESISTANCE: >100Mega-Ohms
9. DIELECTRIC STRENGTH: 1,500 Volts for 1min.
3,000 Volts between poles
10. OPERATING TEMP: -30°C to 85°C
- ▲11. HOUSING COLOR: BLACK
- ▲12. ACTUATOR COLOR: WHITE
- ▲13. ▲ DENTIOES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	20434	CORRECT RATING	01/27/12	BMA
A	13397	RELEASED FOR PRODUCTION	8/26/03	AR

TITLE	SCALE	DATE	DR	DWG	REV
RC1083BBLKWHITFFO	1.5:1	8/26/03	AR	P301509	B

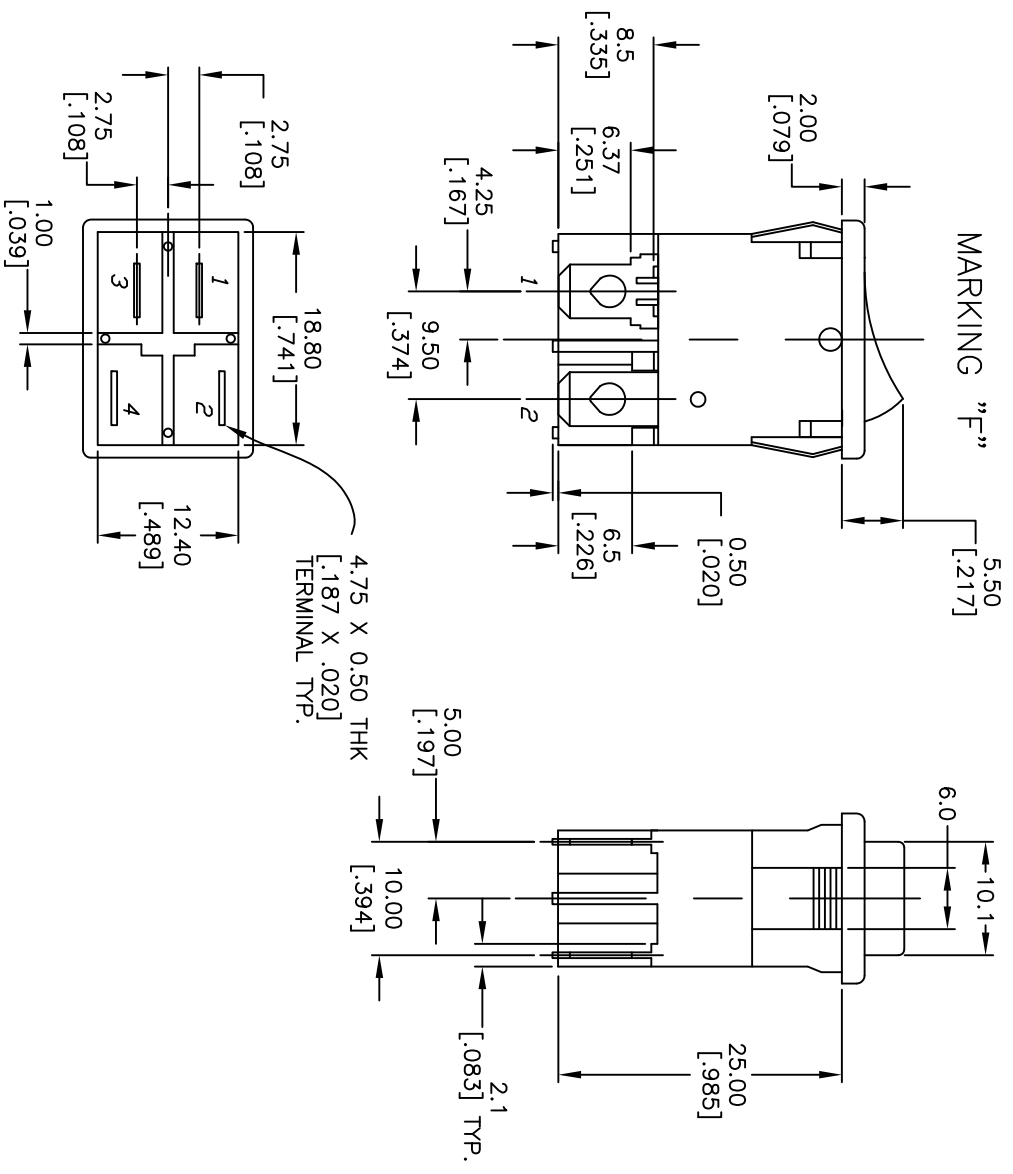

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED