


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/11/99	

- DO-IT-YOURSELF (DIY) 4mm IN-LINE JACK, SCREW ATTACHMENT.
- SPECIFICATIONS:  
INSULATOR BODY: POLYAMIDE (NYLON)  
JACK BODY: BRASS, NICKEL PLATED
- RATING:  
VOLTAGE: 1,200V AC/DC  
CURRENT: 36A MAX.  
TEMPERATURE: -20° C TO +80° C.
- MAXIMUM WIRE SIZES:  
CONDUCTOR:  $\varnothing.090$  (12AWG)  
STRIP LENGTH: .25 (6.4)

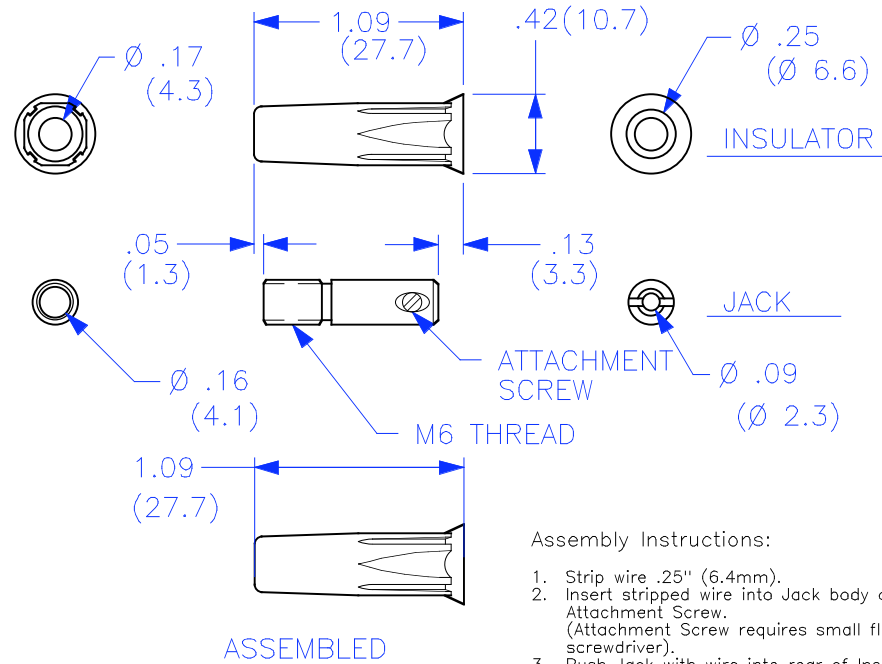

**PART NUMBER**

**CT2215-#**

- COLOR:
- 0 - BLACK
  - 2 - RED
  - 4 - YELLOW
  - 5 - GREEN
  - 6 - BLUE
  - 9 - WHITE

Assembly Instructions:

- Strip wire .25" (6.4mm).
- Insert stripped wire into Jack body and tighten Attachment Screw. (Attachment Screw requires small flat blade screwdriver).
- Push Jack with wire into rear of Insulator housing and thread.
- Using same small screwdriver, engage Jack slots through rear of Insulator and snug Jack into Insulator housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS $\pm 1/32$ .XX $\pm .02$ .XXX $\pm .005$ DO NOT SCALE DRAWING	CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
			APPROVALS	DATE	TITLE			
		DRAWN	WDH	7/11/99	<b>DIY 4mm JACK, SCREW</b>			
		CHECKED			SIZE	CAGE CODE	DWG. NO.	REV.
		ENGR.			A	43F45	P221500	—
NEXT ASSY		DESIGN ACTIVITY			SCALE	1:1	SHEET	1 OF 1
APPLICATION								