

4

3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT - TE Connectivity

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-	E1	REVISED PER ECO-11-005140	26MAR11	RK HMR
		G	1.CHANGE TE LOTO2.ADD LINE IDENTIFICATION3.TERMINALS TOLERANCE CLARIFICATION ECO-12-005305	02-APR-12	YS,H BH,Y

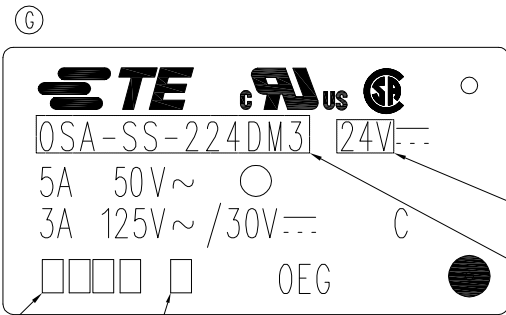


PART B

PART A




LOT NO.

ONE CHARACTER FOR LINE IDENTIFICATION (G)

WIRING DIAGRAM(BOTTOM VIEW)

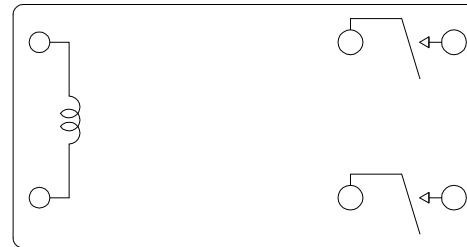

PC BOARD LAYOUT DIAGRAM(BOTTOM VIEW)

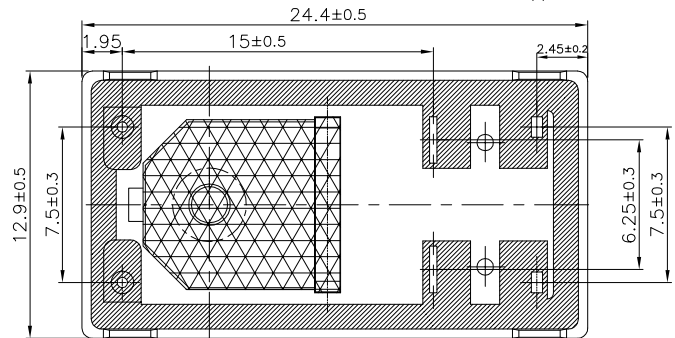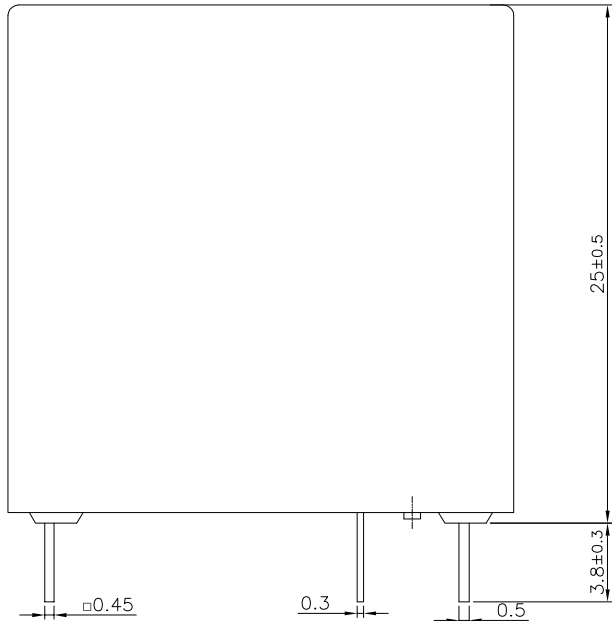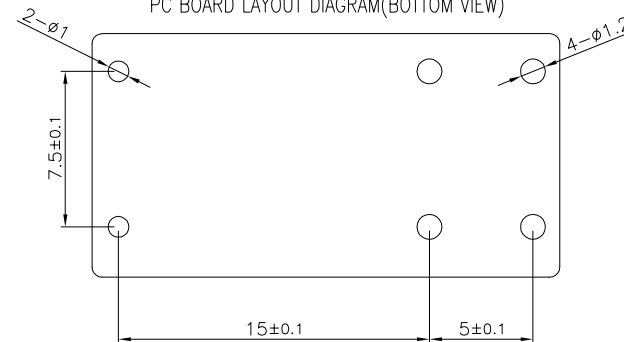

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Huang.Yunshou		TE Connectivity
DIMENSIONS: mm		CHK	Yu.Banghua		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	Zhang.Sunny		
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC	-		
MATERIAL	FINISH	APPLICATION SPEC	-		NAME
-	-	WEIGHT	-		OSA-SH-2**DM3,000 CUSTOMER DWG
		CUSTOMER DRAWING	SIZE	A3	CAGE CODE
			00779	DRAWING NO	©=3-1419124-5
		SCALE	4:1	SHEET	1 OF 2
		REV	G		

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By TE Connectivity ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


i	1461388-5	OSA-SH-248DM3	48V	OSA-SH-248DM3,000	107-79015(TRAY)
h	1461388-2	OSA-SH-206DM3	6V	OSA-SH-206DM3,000	107-79015(TRAY)
g	1461388-1	OSA-SH-205DM3	5V	OSA-SH-205DM3,000	107-79015(TRAY)
f	2-1440007-5	OSA-SH-224DM3	24V	OSA-SH-224DM3,000	107-79015(TRAY)
e	4-1419124-3	OSA-SH-224DM3	24V	OSA-SH-224DM3,000M	107-79016(TUBE)
d	8-1440001-3	OSA-SH-218DM3	18V	OSA-SH-218DM3,000	107-79015(TRAY)
c	3-1419124-5	OSA-SH-212DM3	12V	OSA-SH-212DM3,000	107-79015(TRAY)
b	3-1419124-6	OSA-SH-212DM3	12V	OSA-SH-212DM3,000M	107-79016(TUBE)
a	8-1440001-0	OSA-SH-209DM3	9V	OSA-SH-209DM3,000	107-79015(TRAY)
No.	PART NO.	PART A	PART B	TYPE NAME	PACKING SPEC

RELAY TYPE

			EPOXY RESIN	SEAL	14
			POLYURETHANE Cu WIRE	MAGNETIC WIRE	13
UL 94V-0			PA66	CARD	12
UL 94V-0			PBT	CASE	11
UL 94V-0			PBT	BOBBIN	10
		SOLDER DIP	Cu Alloy	COIL TERMINAL	9
		SOLDER DIP	Cu Alloy	HINGE SPRING	8
			Ag Alloy	S-CONTACT	7
			Ag Alloy	C-CONTACT	6
		SOLDER DIP	Cu Alloy	M-TERMINAL	5
		SOLDER DIP	Cu Alloy	MOVABLE SPRING	4
		Ni PLATING	STEEL	CORE	3
		Ni PLATING	STEEL	ARMATURE	2
		Ni PLATING	STEEL	YOKE	1
INCOMBUSTIBILITY	NOTES	FINISH	MATERIAL	DESCRIPTION	ITEM

NOTE:

- 1.TERMINAL DIMENSIONS WITHOUT TINNING.
- 2.LOT NO. SYSTEM AS FOLLOWING:



- 3.FOR THE TIN-PLATING OF THE PINS:
 +0.1mm FOR WIDTH, THICKNESS AND DIAMETER
 +0.5mm FOR LENGTH

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.5mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN: Huang.Yunshou	TE Connectivity	
	0 PLC ± -	CHK: Yu.Banghua	NAME	
	1 PLC ± -	APVD: Zhang,Sunny	OSA-SH-2**DM3,000 CUSTOMER DWG	
	2 PLC ± -	PRODUCT SPEC: -	SIZE: A3	CAGE CODE: 00779
	3 PLC ± -	APPLICATION SPEC: -	DRAWING NO: ©=3-1419124-5	RESTRICTED TO: -
4 PLC ± -	ANGLES ± -	WEIGHT: -	SCALE: 4:1	SHEET: 2 OF 2
MATERIAL: -	FINISH: -	CUSTOMER DRAWING	REV: G	