


REV. 2  
DCO 62982

COIL: @ 25°C	
SET	RESET
1150 OHMS ±10%	1150 OHMS ±10%
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE
13.5 VDC MUST OPERATE	13.5 VDC MUST OPERATE
ENVIRONMENT:	
VIBRATION	10 Hz      2000 Hz      30 g's
SHOCK	100 g's      6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 5 MS MAX. CONTACT BOUNCE 2 MS MAX.	

CUSTOMER DATA SHEET

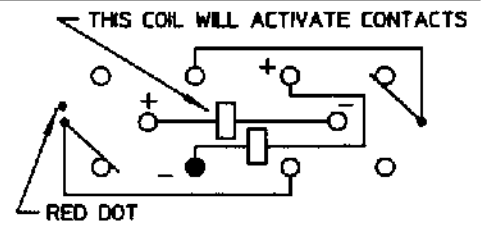

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 9/9/98

CK. *9/30/98 JYS*



CUST. C. I. I. STD.  
CUST. NO. \_\_\_\_\_

TYPE "LF" RELAY

LF2149K00