

CX5060 – MOCA POINT OF ENTRY FILTER



**CX5060**

- FILTER, 5–1002 MHz
- IMPEDANCE = 75 OHMS
- POINT of ENTRY FILTER FOR MOCA APPLICATIONS
- 6KV SURGE PROTECTION
- METAL HOUSING

NOTES: UNLESS OTHERWISE SPECIFIED

1. OPERATING TEMPERATURE: -40°C TO +85°C
2. STORAGE TEMPERATURE: -20°C TO +125°C
3. JEDEC MOISTURE: LEVEL 1.
4. DIMENSIONS ARE IN INCHES WITH THE FOLLOWING TOLERANCE:  
 .XX= ±.02  
 .XXX= ±.010
5. REVISION LEVEL MP1...MPX IS FOR PROTOTYPE RELEASED PRODUCTS.

**ELECTRICAL SPECIFICATIONS: @ 25°C**


1. INSERTION LOSS:

FREQUENCY	
5–860 MHz	-1.0 dB MAX
860–1002 MHz	-1.8 dB MAX
1125–2300 MHz	-40 dB MIN
2300–3000 MHz	-35 dB MIN

2. RETURN LOSS:

FREQUENCY	
5–1002 MHz	-16 dB MIN

**MECHANICAL SPECIFICATIONS:**

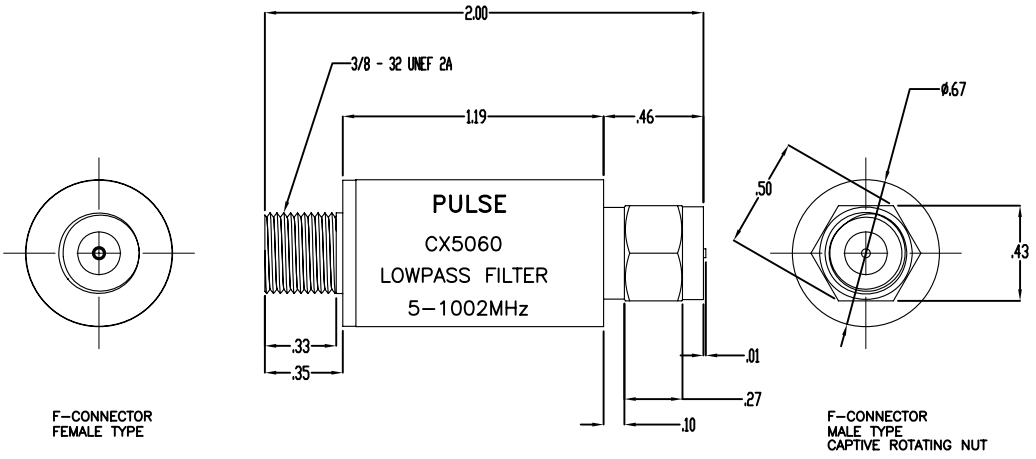

© Copyright, 2010. Pulse Engineering, Inc. All rights reserved. Drawing specifications subject to change without notice. Date (03/10)

PULSE CONFIDENTIAL & PROPRIETARY	PRODUCT SPECIFICATION:	DWG. NO./ PART NO.	SHEET:	REV.
	FILTER, 5–1002 MHz	CX5060	1	MP1

**Pulse**  
 12220 World Trade Drive  
 San Diego, CA, USA, 92128  
 Tel: 858 674 8100