
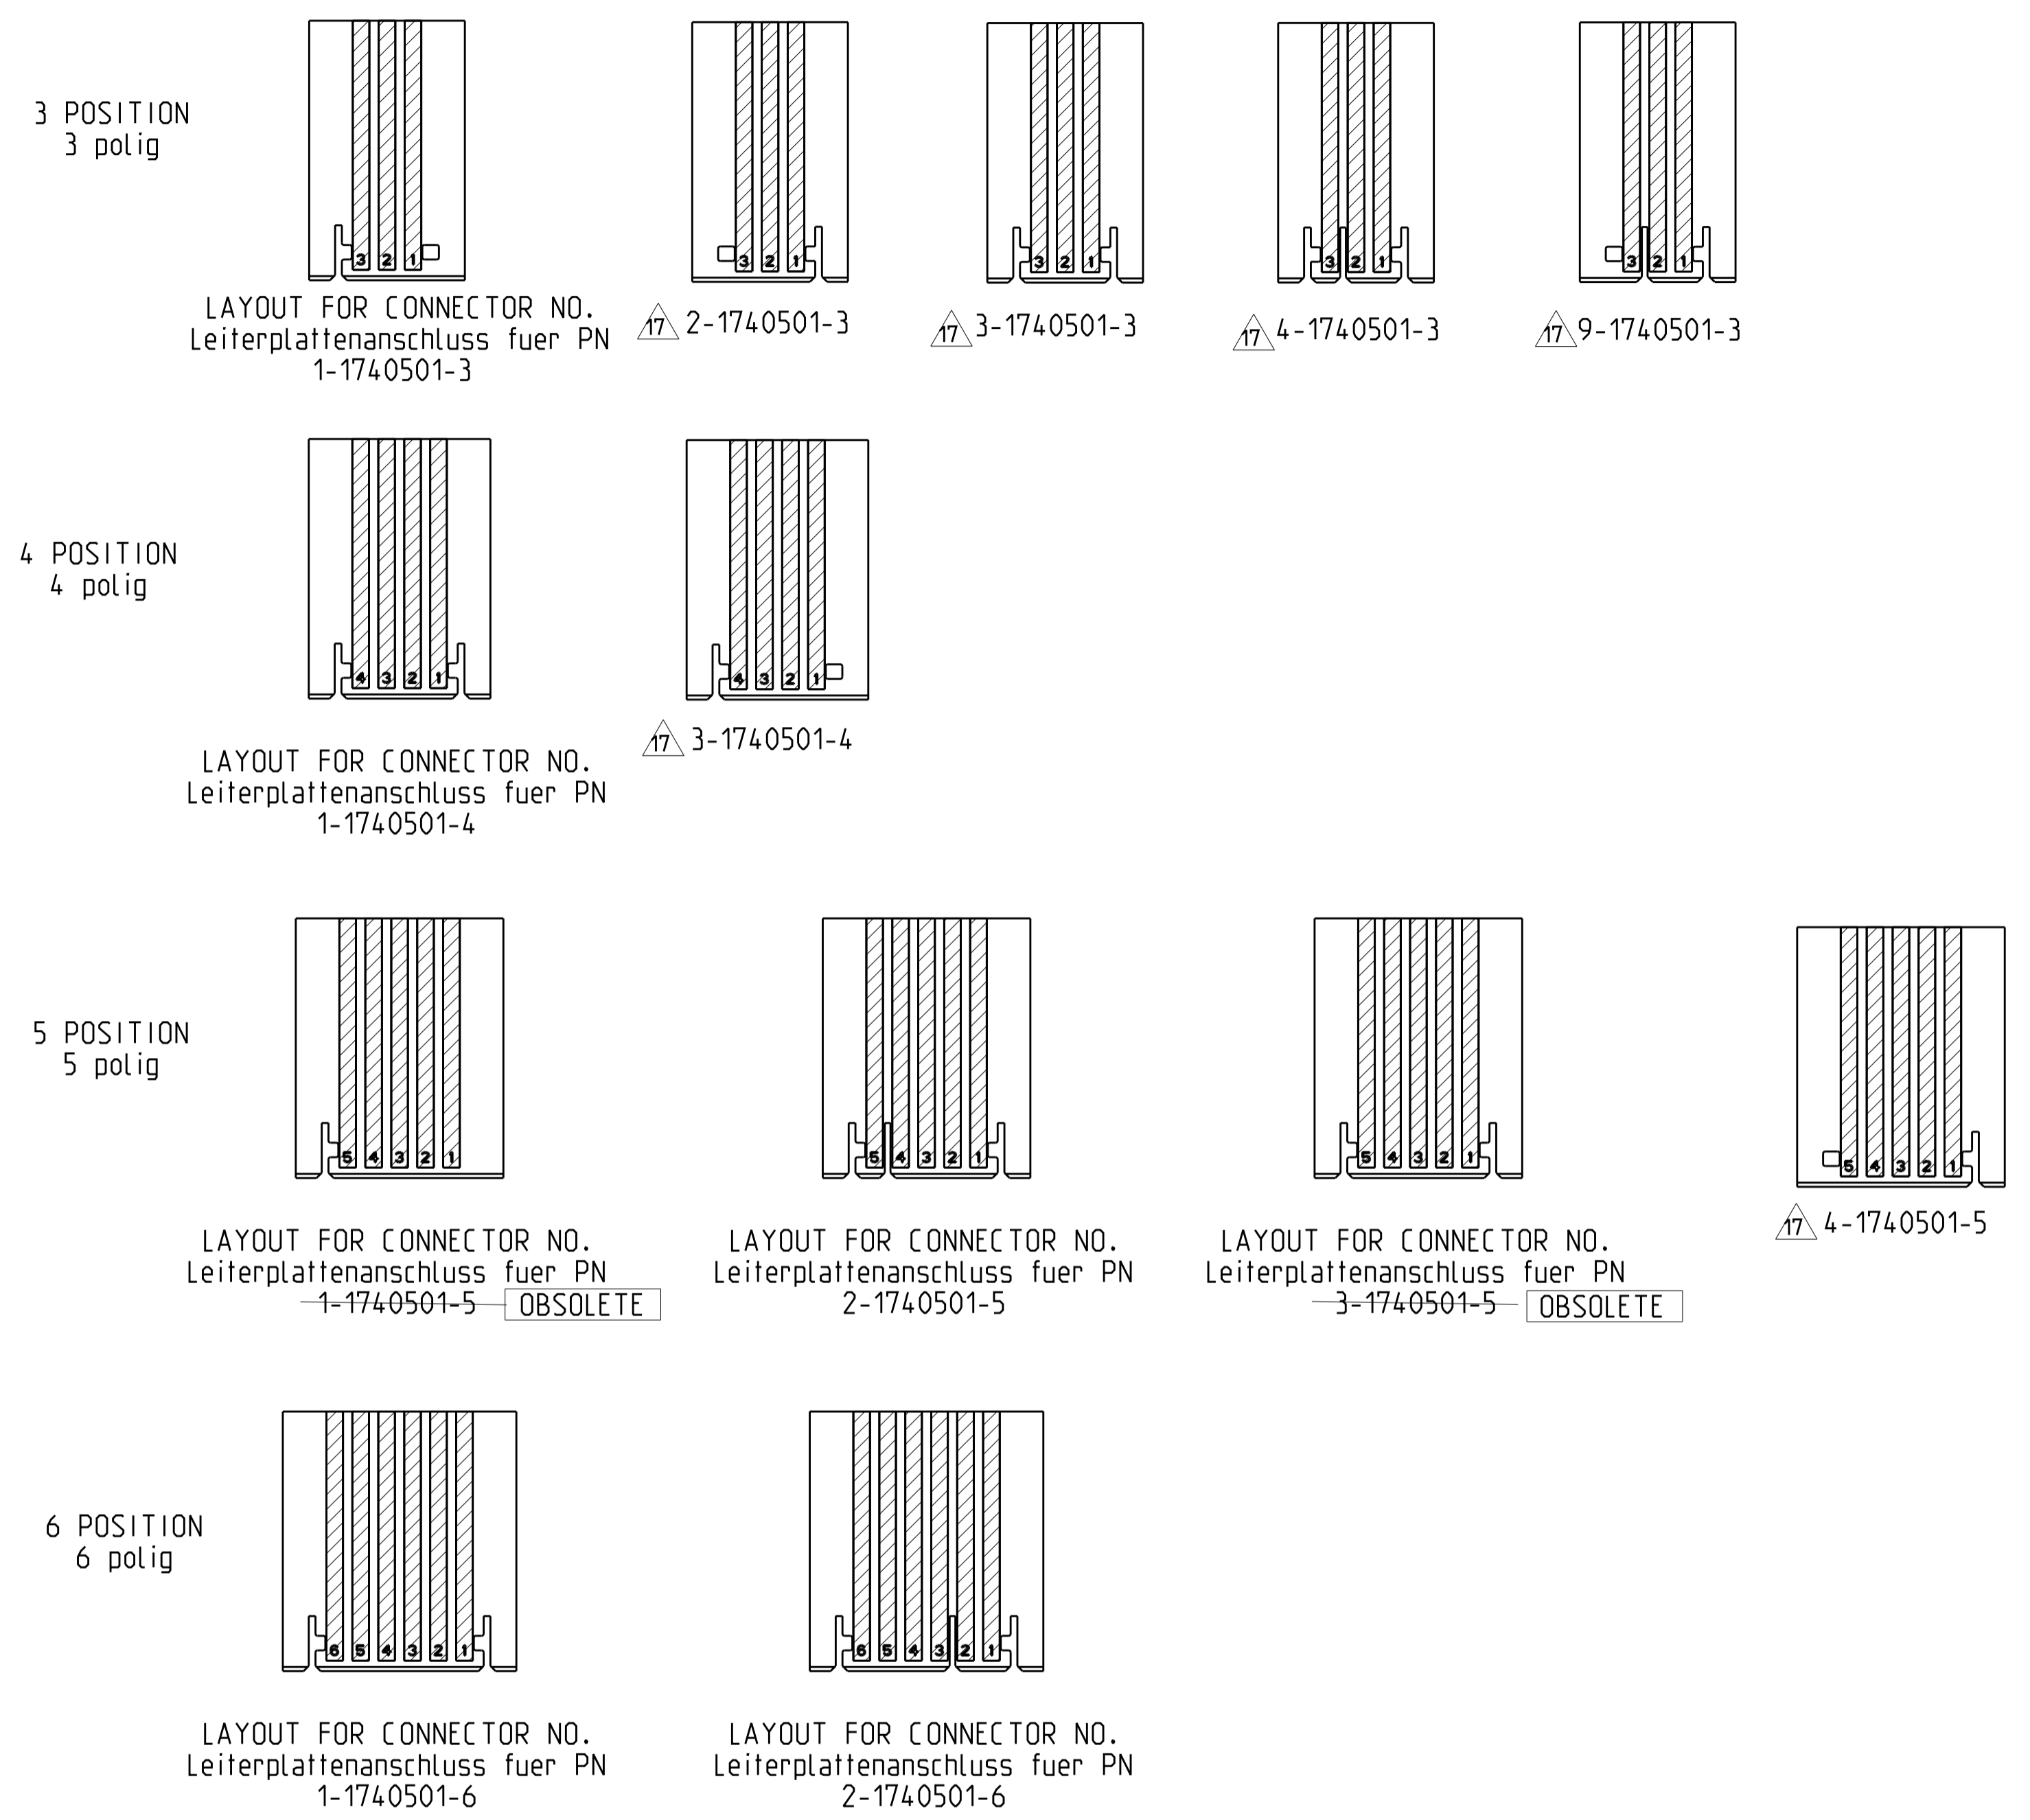


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD			
-		SEE SHEET 1	-	-	-			

PCB LAYOUT IN GENERAL
 Leiterplattenanschluss allgemein
3-20 POSITION
 3-20 polig

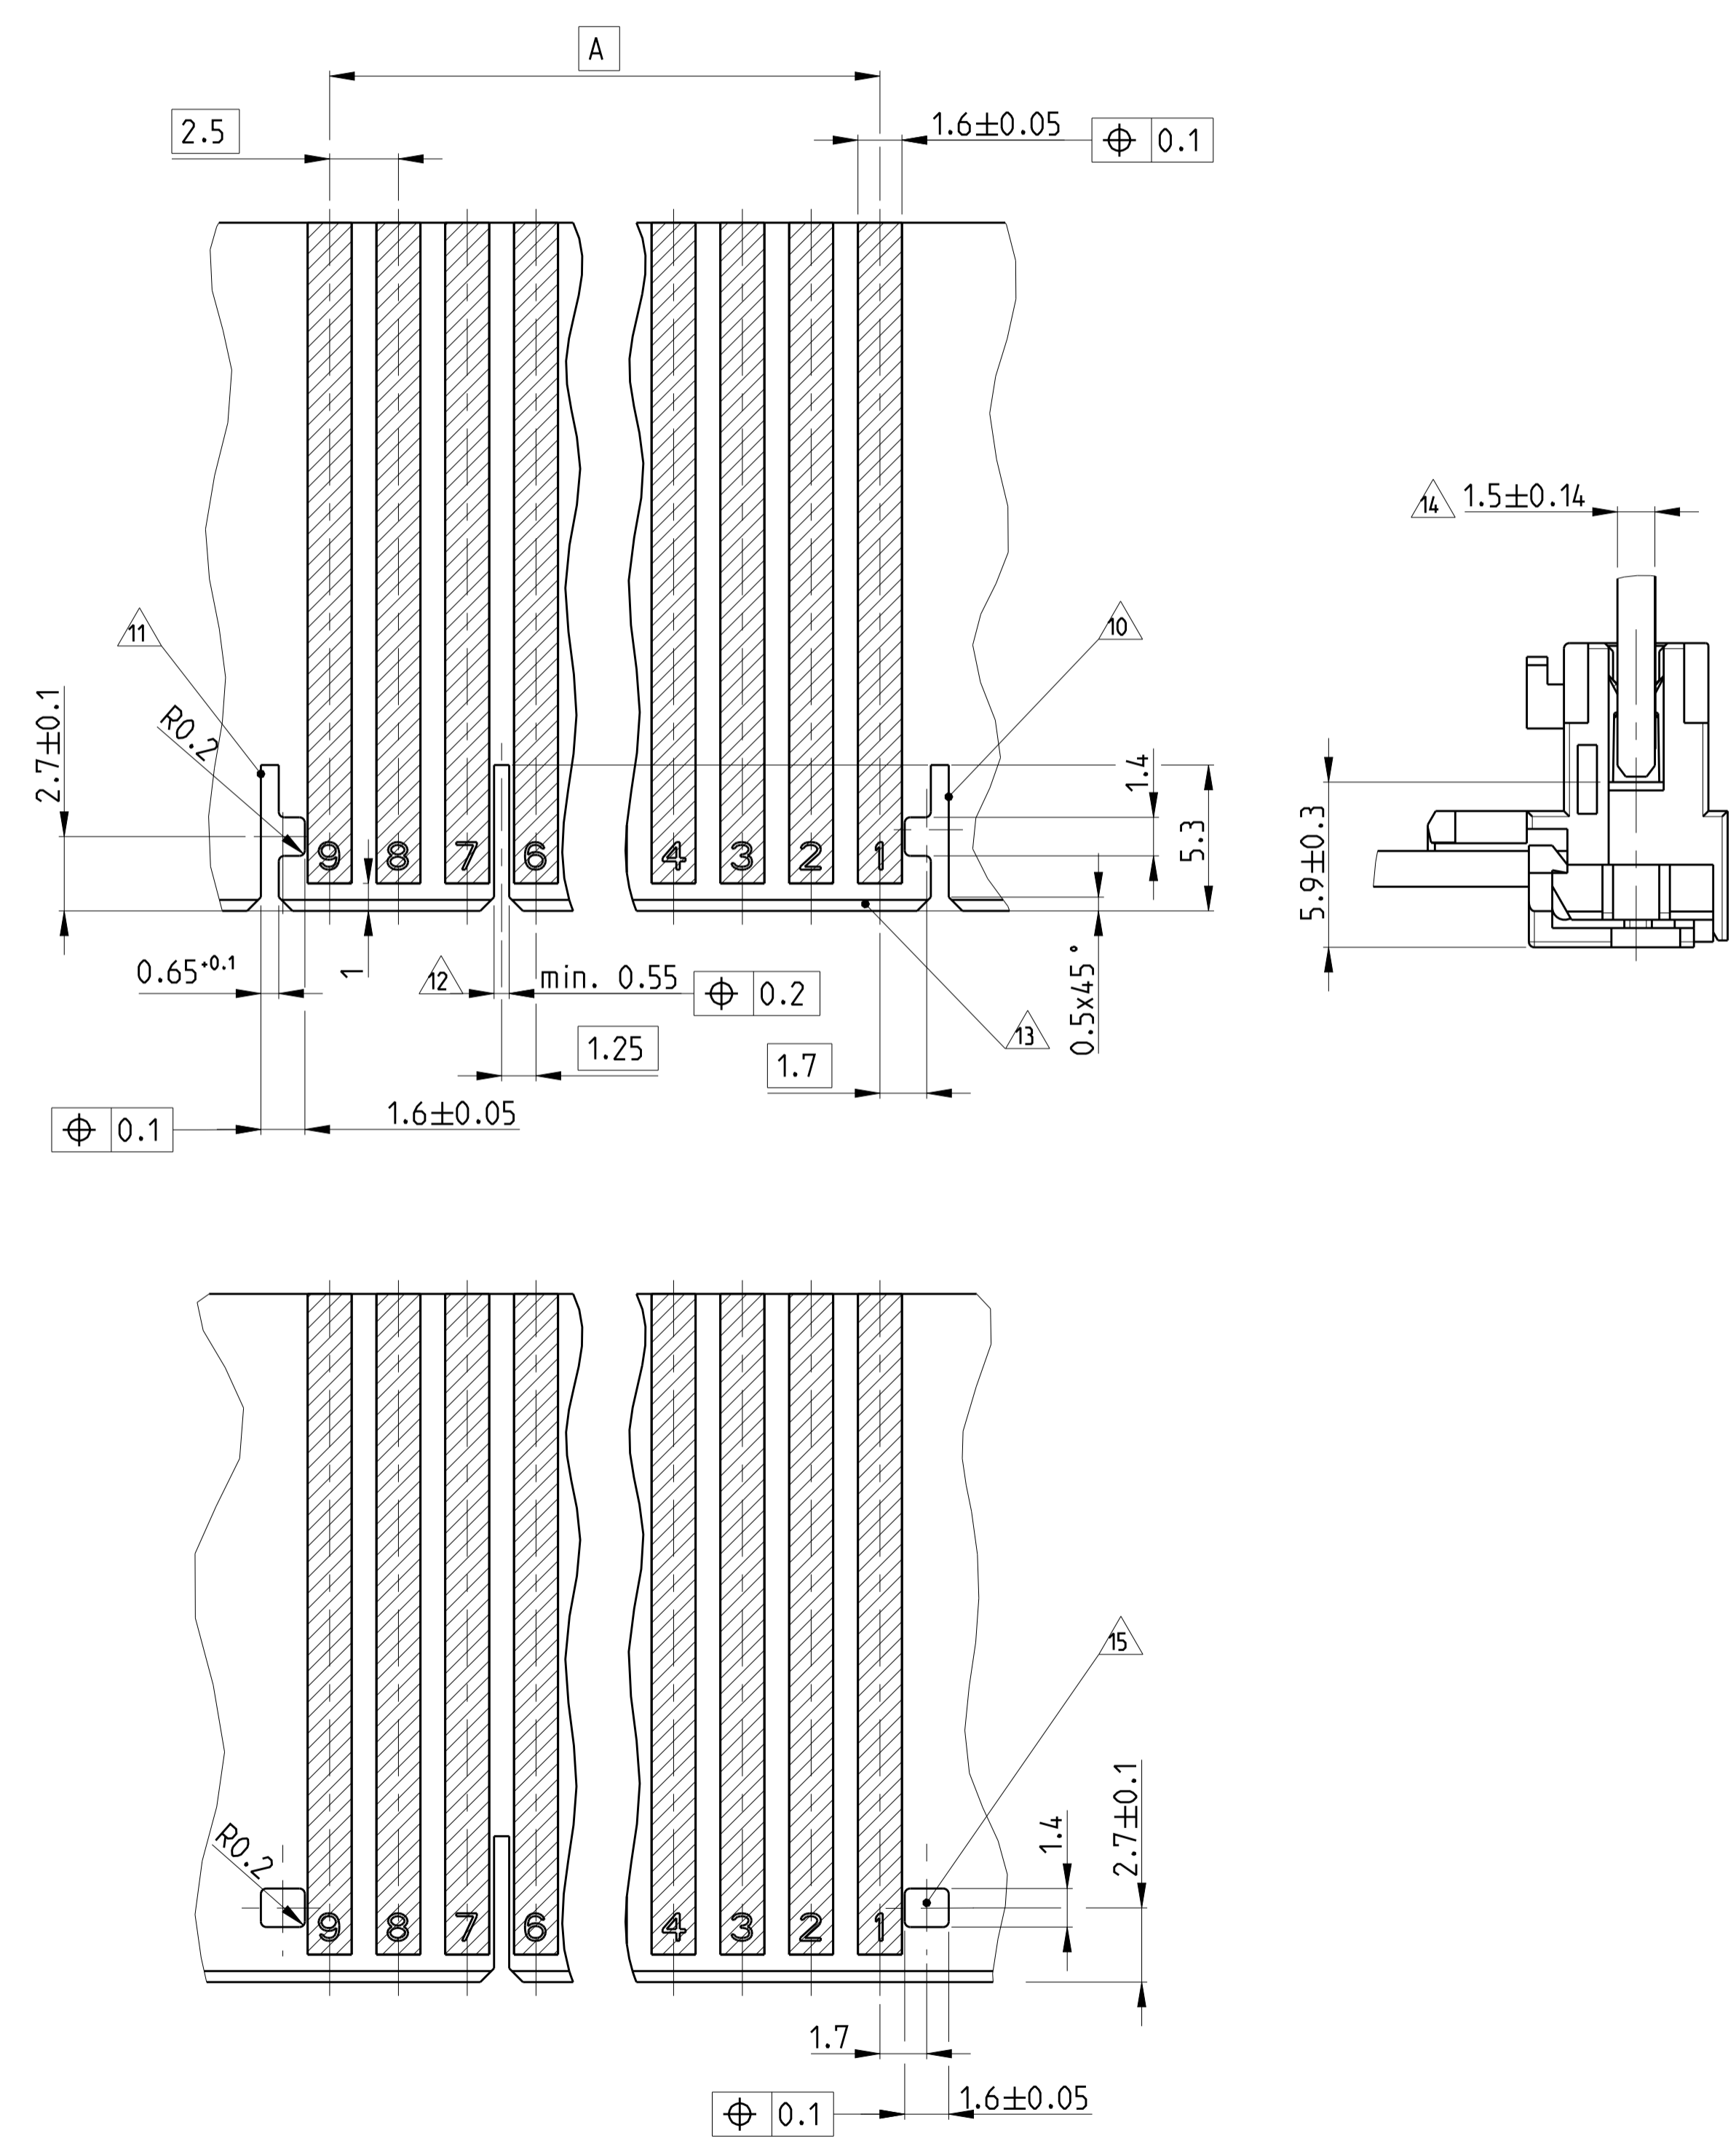


- △15 WINDOW FOR LOCKING HOOK
Fenster fuer Rasthaken
- △14 INCLUSIVE COPPER CLADDING, SINGLE OR DOUBLE SIDED
Inklusive Kupferkaschierung, ein oder doppelseitig
- △13 PCB TO BE PREFERABLY CHAMFERED
Leiterplatte vorzugsweise angefast
- △12 SLOT FOR ADDITIONAL KEYING RIB BETWEEN CAVITY NO.
Schlitz fuer zusaetzliche Kodierrippe zwischen Kammer Nr.
- △11 SLOT FOR SIDE KEYING, ON LAST CAVITY
Schlitz fuer Seitenkodierung, bei letzter Kammer
- △10 SLOT FOR SIDE KEYING, ON CAVITY NO. 1
Schlitz fuer Seitenkodierung, bei Kammer Nr. 1
- △1 - △9 SEE SHEET 1
Siehe Blatt 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. Alzmann 27.10.2005	TE Connectivity
DIMENSIONS: mm		CHK B. Schnaubel 27.10.2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. Klenner 27.10.2005	NAME AMP DUOPLUG 2.5 MKII FEMALE CONNECTOR 3-20 POSITION (WITH PCB LOCKING)
MATERIAL SEE TABLE		PRODUCT SPEC 108-18785	SIZE CAGE CODE DRAWING NO. RESTRICTED TO
		APPLICATION SPEC 114-18467	A1 00779 C=1740501
		WEIGHT -	SCALE 7:1 SHEET 2 OF 3 REV B9
		CUSTOMER DRAWING	


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
-		SEE SHEET 1	-	-	-		

18 SPECIAL PCB LOCKING VERSION A

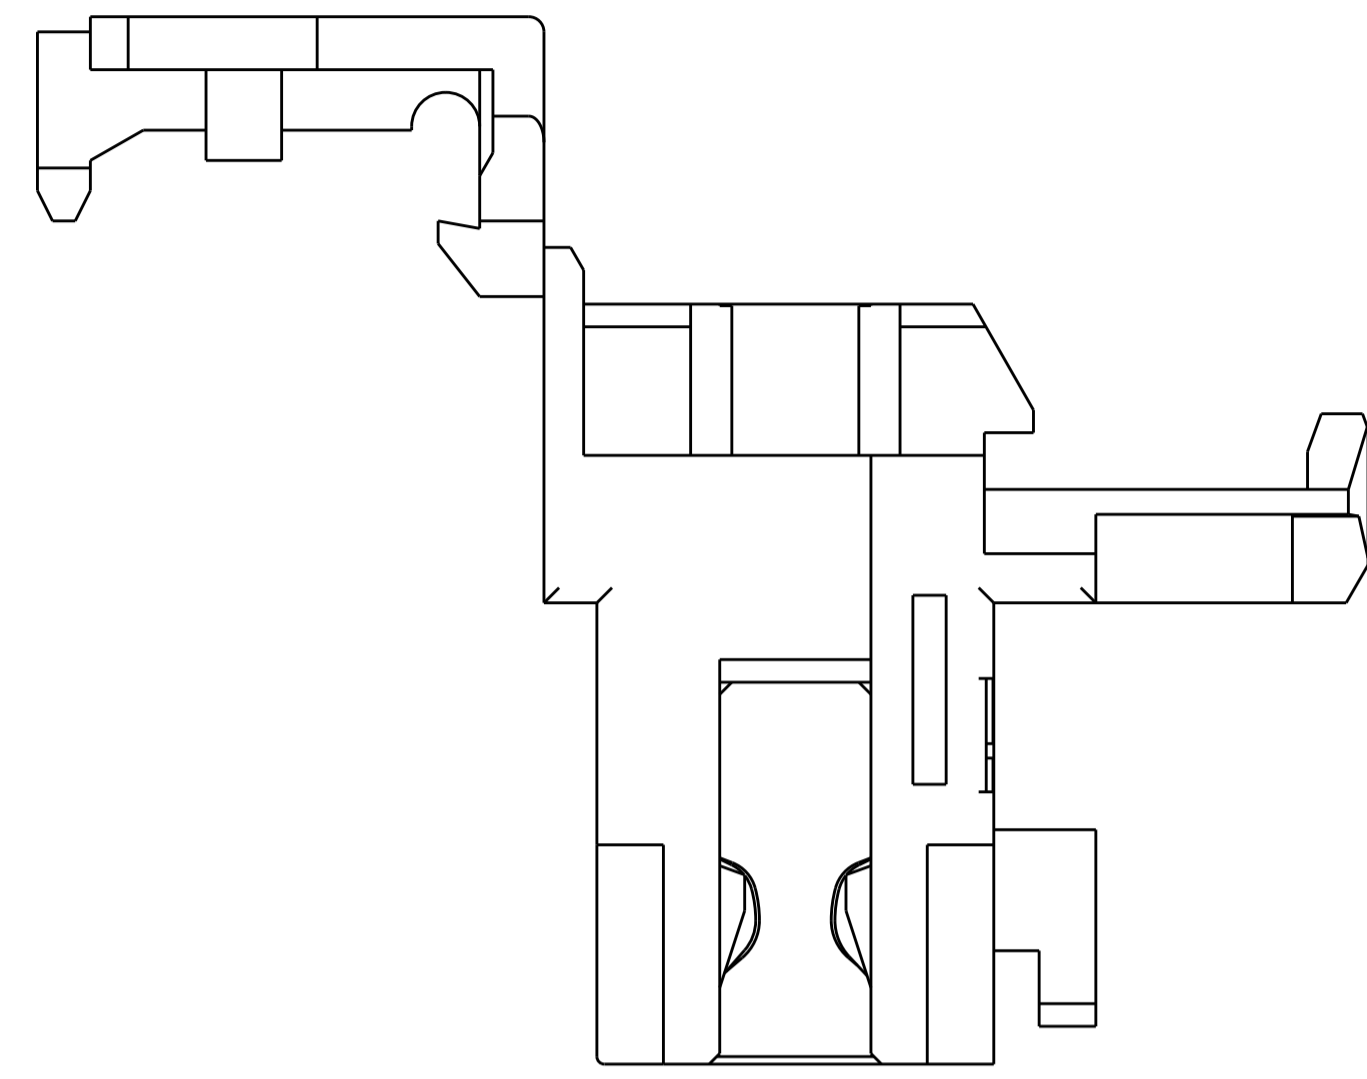

10:1

19 SPECIAL PCB LOCKING VERSION B

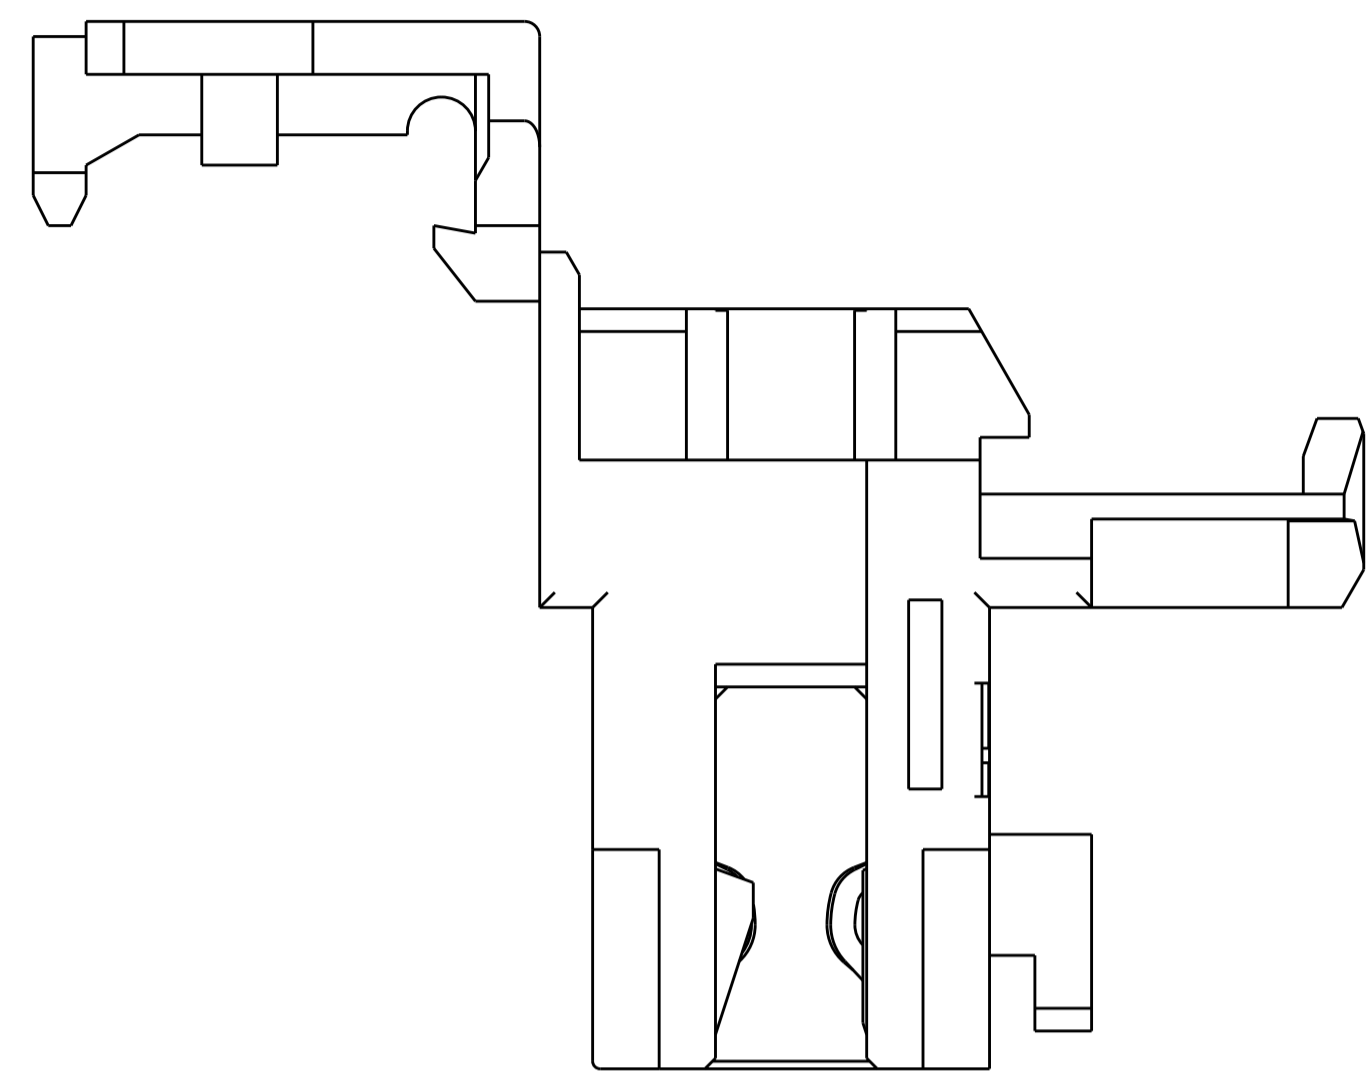

10:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. Alzmann 27.10.2005	
		CHK B. Schnaubel 27.10.2005	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ±0.2 ANGLES ±° FINISH -	NAME AMP DUOPLUG 2.5 MKII FEMALE CONNECTOR 3-20 POSITION (WITH PCB LOCKING)
MATERIAL SEE TABLE		APVD T. Klenner 27.10.2005 PRODUCT SPEC 108-18785 APPLICATION SPEC 116-18467 WEIGHT - CUSTOMER DRAWING	SIZE CAGE CODE DRAWING NO RESTRICTED TO A1 00779 C=1740501 -
		SCALE 5:1	SHEET 3 OF 3
			REV B9