


SPECIFICATION CONTROL DRAWING

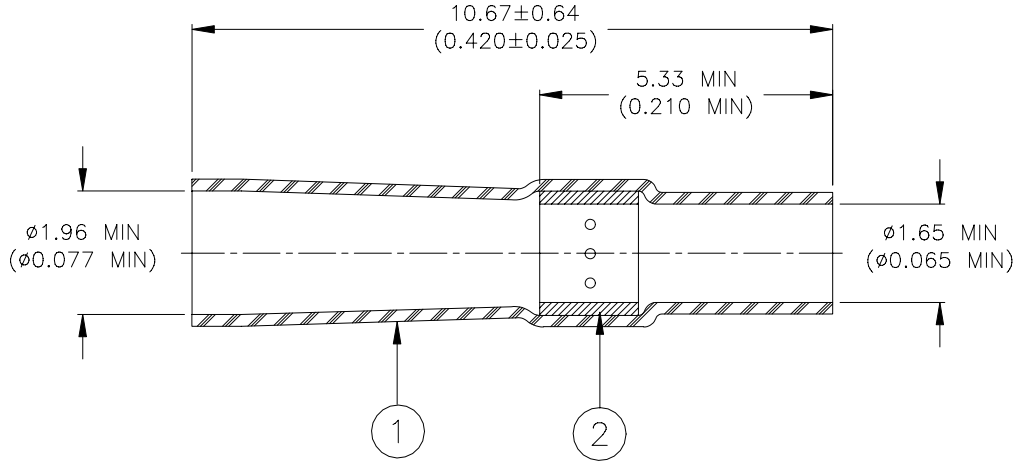

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI/J-STD-006.
 - FLUX: TYPE ROL1 per ANSI/J-STD-004.

APPLICATION

1. This part is designed to terminate tin or silver plated stranded wires, AWG sizes 28 to 24, to #20 solder cups in Hermetic D-subminiature connector.
2. Sleeve will recover to 0.76 (0.030) max.
3. Temperature range: -55°C to +150°C.

		Raychem Products 305 Constitution Drive Menlo Park, CA 94025, USA		TITLE : SOLDERSLEEVE, #20 HERMETIC D-SUBMINIATURE CONNECTOR, 28 - 24 AWG HIGH TEMPERATURE WIRE			
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.				DOCUMENT NO.: D-136-21			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D020285	REPLACES: N/A		
DRAWN BY: mforonda	DATE: 8-Jul-02	PROD. REV. B	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check the latest revision.