ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00400	Connector, stereo plug, 2.5xL19.6 mm, brass, nickel plated, molding style	1	
2	30-00179	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00028	Overmold, PVC, black	1	

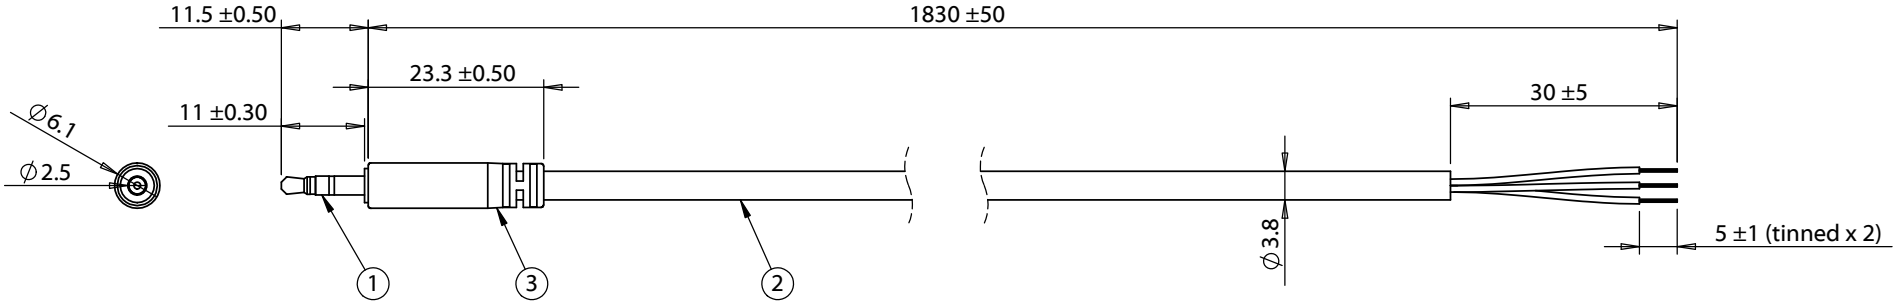



Wiring Diagram	
50-00400	wire color
A	red
B	white
C	green

Revision:	Date:	Description:
A1	9/6/2011	Updated specifications
A2	3/28/2012	Changed wire part number
A3	9/17/2012	Changed connector to 50-00252
A4	4/17/2013	Changed connector to 50-00349
A5	10/9/2014	Changed connector to 50-00400

Prepared: GL 2016.07.14 16:17:43 -07'00'

Verified: LA Digitally signed by LA Date: 2016.07.15 16:11:12 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 2.5 mm 50-00400 slim stereo plug to 5 mm tinned, 28 AWG, 30-00179, shielded

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-00342

Scale: 1:5

Sheet 1 of 1

5 4 3 2 1