



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B2	REVISED PER ECO-11-005033	24MAR11	RK	HMR

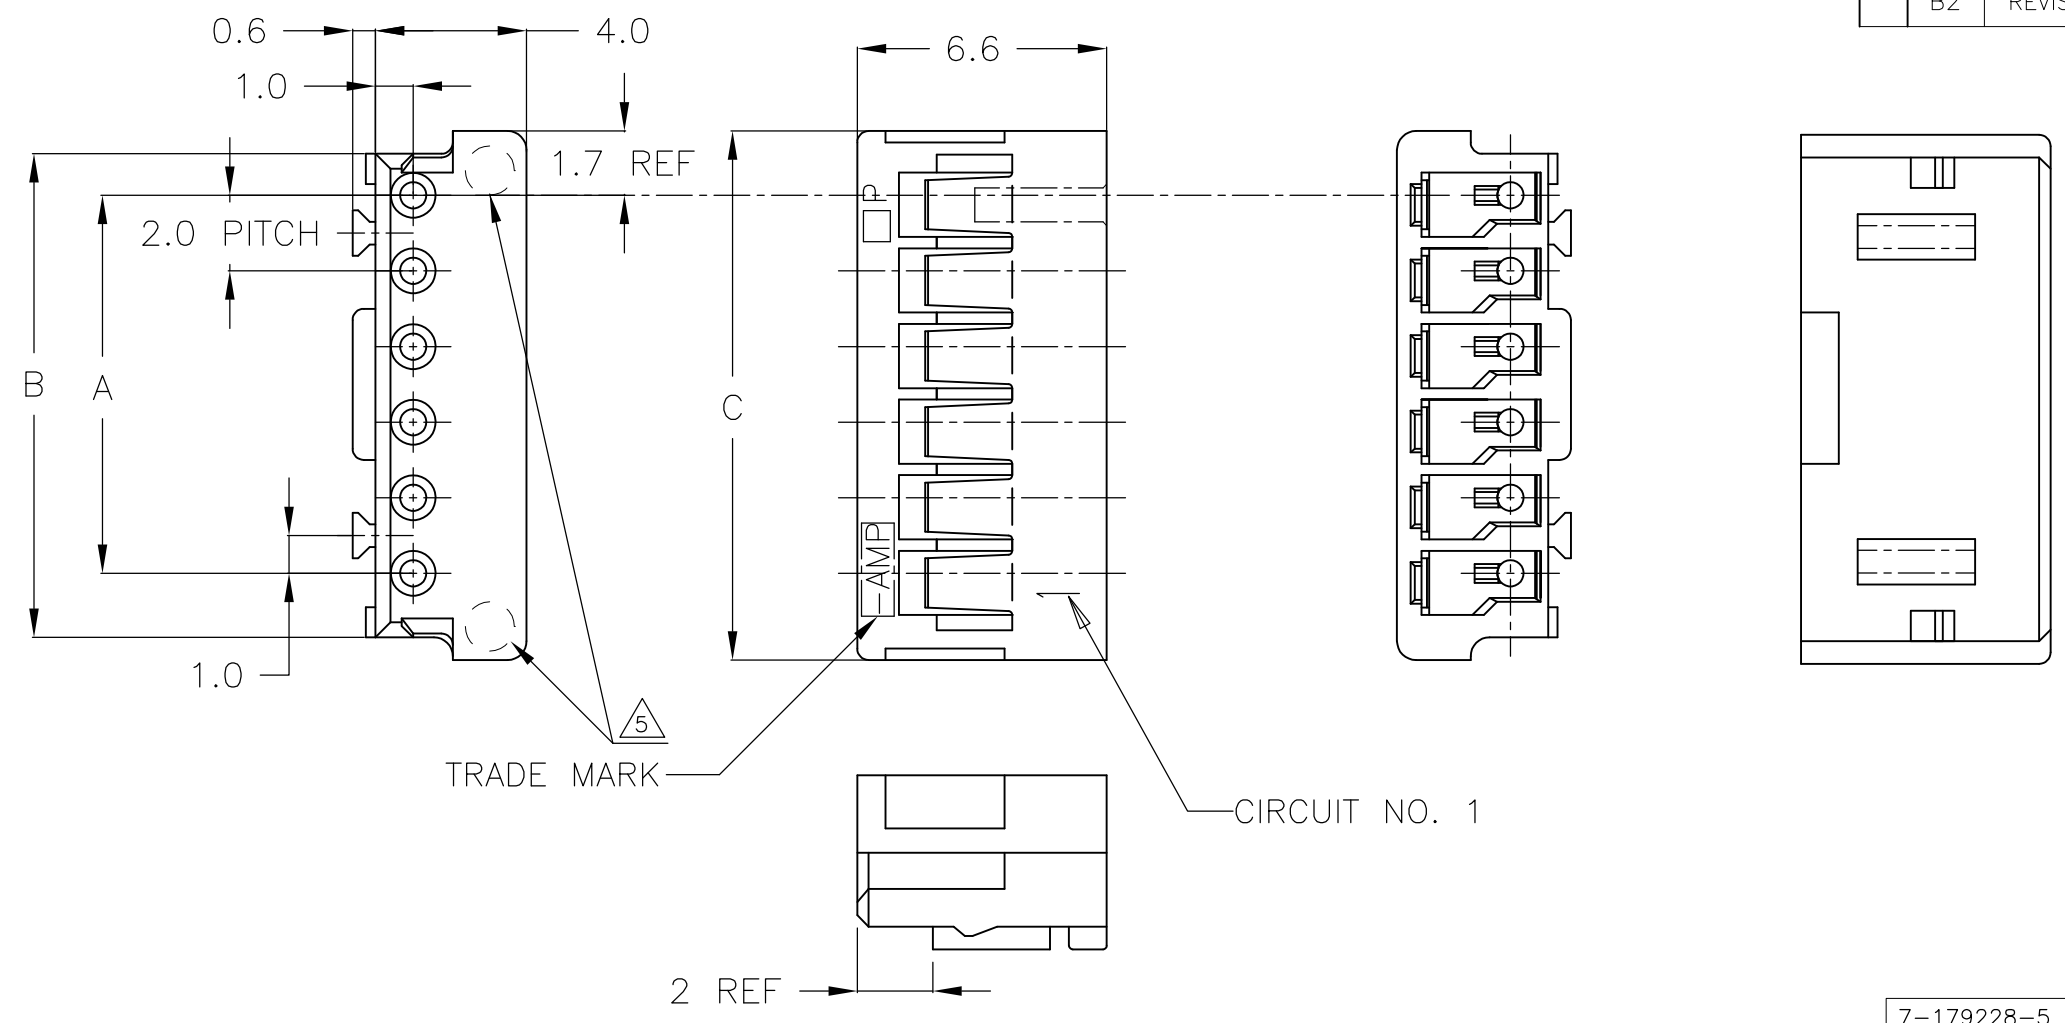

- NOTES:
- 1 MATERIAL : 66 NYLON (UL94V-0)
  - 2. PRODUCT SPEC.: 108-5408
  - 3. APPLICATION SPEC.: 114-5179
  - 4 7-179228-3 WAS OBSOLETE.
  - 5 CAVITY NUMBER LOCATED. (OPTIONAL)

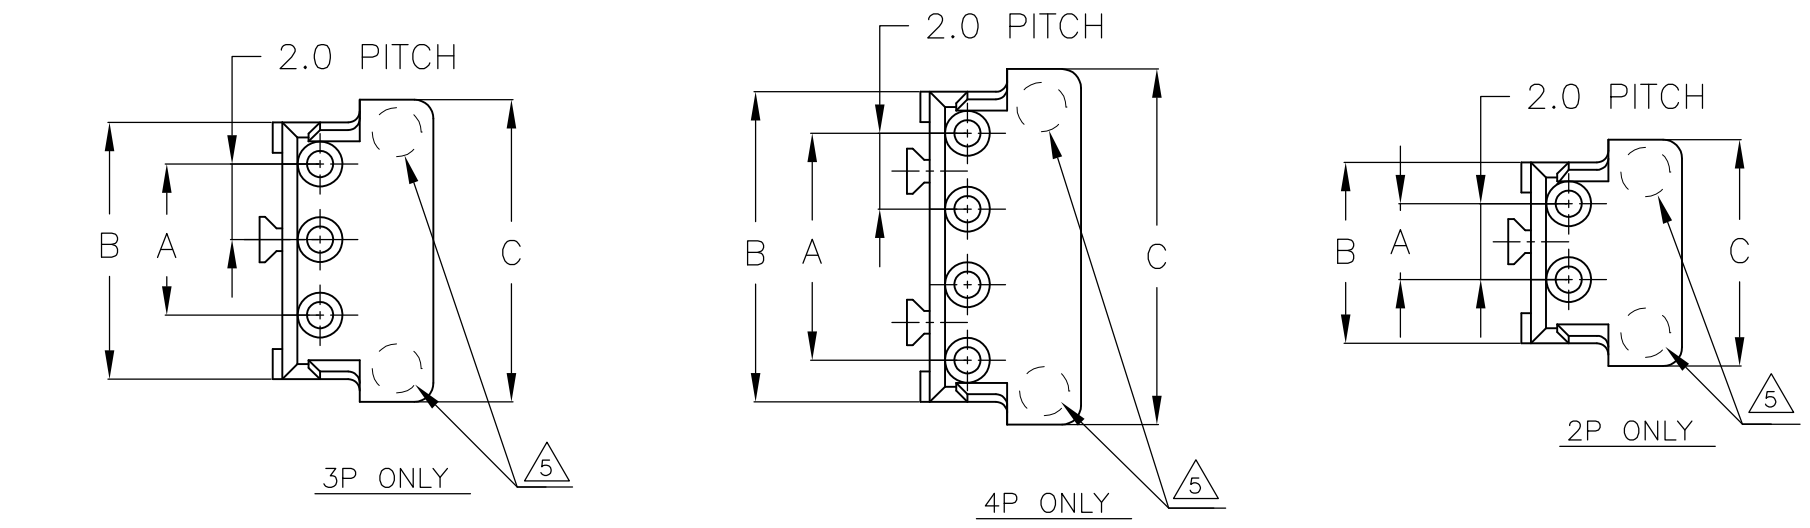

7-179228-5	5-179228-5	3-179228-5	1-179228-5	15	28	30.8	32.0
7-▲	5-▲	3-▲	1-▲	14	26	28.8	30.0
7-▲	5-▲	3-▲	1-▲	13	24	26.8	28.0
7-	5-	3-	1-	12	22	24.8	26.0
7-	5-	3-	1-	11	20	22.8	24.0
7-	5-	3-	1-	10	18	20.8	22.0
6-	4-	2-		9	16	18.8	20.0
6-	4-	2-		8	14	16.8	18.0
6-	4-	2-		7	12	14.8	16.0
6-	4-	2-		6	10	12.8	14.0
6-	4-	2-		5	8	10.8	12.0
6-	4-	2-		4	6	8.8	10.0
6-	4-	2-		3	4	6.8	8.0
6-179228-2	4-179228-2	2-179228-2	179228-2	2	2	4.8	6.0
BLACK	YELLOW	BLUE	NATURAL	POS	A	B	C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	12NOV1993		 TE Connectivity
		CHK	15NOV1993		
		APVD	15NOV1993		
		PRODUCT SPEC			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME
		0 PLC	± -		CRIMP TYPE II RECEPTACLE HOUSING (AMP CT CONNECTOR 2mm PITCH)
		1 PLC	± -		
		2 PLC	± -		
		3 PLC	± -		
		4 PLC	± -		SIZE
		ANGLES	± 3'		CAGE CODE
MATERIAL		FINISH			DRAWING NO
SEE NOTE 1					RESTRICTED TO
GENERAL TOLERANCE					SCALE
0 < * ≤ 10 : ±0.2					NTS
10 < * ≤ 30 : ±0.25					SHEET
30 < * ≤ 100 : ±0.3					1 OF 1
ANGLES : ±3'					REV
					B2
		CUSTOMER DRAWING			