

Ferrule - AI 35 -25 RD - 3200713

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Ferrule, sleeve length: 25 mm, length: 39 mm, color: red

Why buy this product

- The insulation reliability of close connections is increased and the splicing of wires is prevented
- The ferrules with plastic sleeve are made from soft tin-plated electrolytic copper
- The AI 0,25.. ferrules can also be used to process 0.14 mm² conductors

Key Commercial Data

| | |
|------------------------|---|
| Packing unit | 50 STK |
| Minimum order quantity | 50 STK |
| GTIN |  4 017918 094300 |
| GTIN | 4017918094300 |
| Sales Key | 05 |

Technical data

Dimensions

| | |
|--|---------|
| Length (b) | 39 mm |
| Maximum stripping length | 29 mm |
| Sleeve length | 25 mm |
| Inner dimension of the insulating collar (d) | 12.5 mm |
| Ferrule diameter | 8.3 mm |
| Insulating collar thickness | 0.5 mm |
| Sleeve wall thickness | 0.2 mm |

Ambient conditions

| | |
|----------------------------|---|
| Short-term temperature | 120 °C |
| Max. permanent temperature | 105 °C (-40°C no load / 0°C dynamic load) |

Ferrule - AI 35 -25 RD - 3200713

Technical data

General

| | |
|--|---|
| Color | red |
| Components | free from silicone and halogen |
| Flammability rating according to UL 94 | HB |
| Material | CU-DHP |
| Coating | tin-plated (galvanic) |
| Conductor category | Stranded conductors, class 2, 5, 6 / B, C, K, M |

Standards and Regulations


| | |
|--|-----|
| Connection in acc. with standard | CSA |
| Flammability rating according to UL 94 | HB |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing

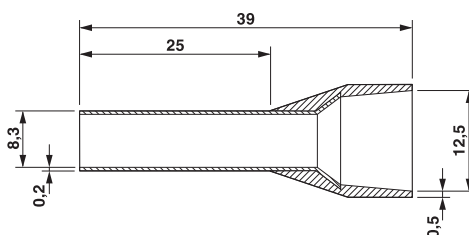

Approvals

Approvals

Approvals

CSA / CSAus / EAC / EAC / UL Listed / cUL Listed / cCSAus

Ex Approvals

Approval details

| | | | |
|-----|--|---|--------|
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 247397 |
|-----|--|---|--------|

Ferrule - AI 35 -25 RD - 3200713

Approvals

| | | | |
|------------|---|---|---------------------|
| CSAus |  | http://www.csagroup.org/services-industries/product-listing/ | 247397 |
| EAC |  | | EAC-Zulassung |
| EAC |  | | 7500651.22.01.00246 |
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E488001 |
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E488001 |
| cCSAus |  | http://www.csagroup.org/services-industries/product-listing/ | |

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>