


CONTACT CONFIGURATION

*(Pos. 1 Denotes Pin No. 1)

RECOMMEND P.C.B. LAYOUT

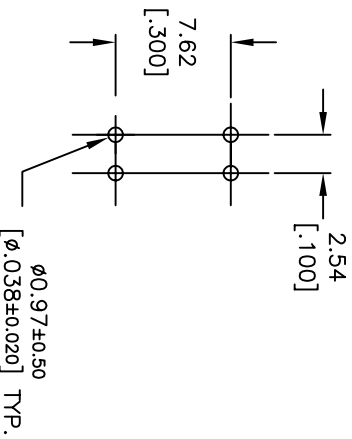

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 - ▲ 4. CONTACT RATINGS: 25mA @24VDC.
 5. MATERIAL (TERMINALS/CONTACTS):
PHOSPHOR BRONZE w/Gold Plate over
Nickel Plate
 6. INSULATION RESISTANCE:
100Mega-OHMS min @500VDC
 7. CONTACT RESISTANCE (INITIAL):
50MILLI-OHMS @2-4VDC @100mA
 8. OPERATING FORCE: 1000gf max.
 9. TRAVEL: 2mm typical
 10. PACKAGED: DISPENSING TUBES
WITH ALL POLES IN THE "OFF" POSITION.
 11. ▲ DENOTES CRITICAL PARAMETER.
 12. 2002/95/EC (ROHS) COMPLIANT

B	16865	REVISED AND REDRAWN	1/15/2007	TN
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE		KAS1102E		
SCALE	DATE	DR	DWG	REV
2:1	1/15/2007	TN	N211020	B

