


Miniature Neon Indicators

WITH BUILT-IN RESISTOR



T-3 1/4
B1A (NE-51)
B2A (NE-51H)
MINIATURE BAYONET BASE

See lamp ratings
on page L.

Recognized under the component
program of Underwriters'
Laboratories Inc.

75W., 125V



FOR REAR MOUNTING IN 9/16" CLEARANCE HOLE


MATERIALS AND FINISHES

- **Mounting Bushing:** Standard—brass, black nickel finish. Optional—white nickel finish.
- **Lens Holder:** Standard—brass, black nickel finish. Optional—polished chrome finish.
- **Standard Hardware:** Three (3) knurled ring—brass, black nickel finish.
- **Optional Hardware:** One (1) knurled ring—brass, black nickel finish; one (1) mounting nut—brass, white nickel finish; one (1) internal-tooth lockwasher—steel, cadmium plated with yellow iridescent chromate finish.
- **Terminals:** Solder — brass, hot tinned with elongated slot. Screw—brass, white nickel finish.

NOTE: Where optional metal finish is chosen for lens holder, the same finish will be supplied for knurled ring(s).

How to designate the three digit part number suffix (-XXX)


Finish	Resistor	Hardware
2 - black nickel	1 - 22K	5 - three knurled rings
3 - polished chrome	3 - 33K	6 - knurled ring,
4 - satin chrome	4 - 56K	internal-tooth
	7 - 100K	lockwasher, mtg. nut

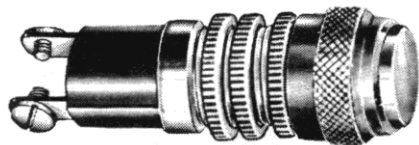

37-1308-0331-245
Flat lens

37 SERIES

WITH SCREW-ON LENS CAPS

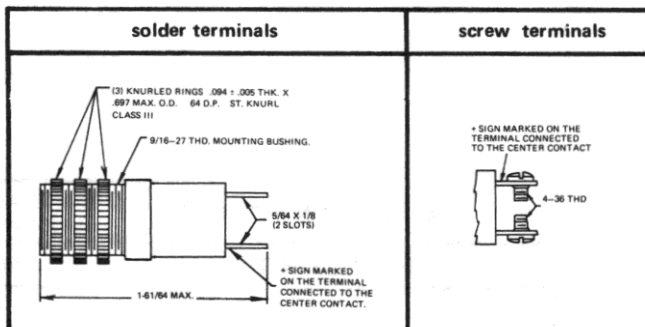

BASE PART NUMBERS

105-125VAC-DC*
110-125VAC†


37-0408-01-245
37-0463-01-215

37-1308-01-245
37-1363-01-215

CAP PART NUMBERS

VOLTAGES

COMPLETE ASSEMBLY PART NUMBERS



FLAT

37-0331-200
transparent

Flat faced lens caps can be supplied with legends in positive or negative style on the face of the lens.

105-125V AC-DC
110-125 VAC


37-0408-0331-245
37-0463-0331-215

37-1308-0331-245
37-1363-0331-215

* Standard brightness


† High brightness

OPTIONAL HARDWARE

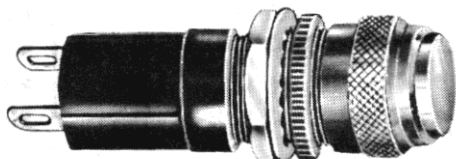

37-0408-0331-246

3/32 X 45/64 ± .020 O.D.
KNURLED RING.
.030 ± .005 X 48/64 ± .020 O.D. INTERNAL TOOTH
LOCKWASHER.
3/32 X 1 1/16 ACROSS FLATS HEX. NUT.



To order with "optional hardware", change the last digit in the catalog number suffix to **6**.
Example:
37-0408-0331-246.

Part numbers listed in this catalog designate products with RED lens.
For ordering lens colors other than red, consult chart on page 2D.

For legends on flat faced lens, see page P.