



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	DATE	APPROVED
A1	CHANGE TO BE NON-BOOT/NO-MOLDING	18/01/07	
A2	CHANGE SR FROM BOOT TO MOLDING	01/03/2007	
A3	CHANGE INSULATION FROM Ø1.0mm TO Ø1.1mm & US PLUG	26.11.2014	
A4	ADD COLOR BLACK	23/May/2015	
A5	ADD LENGTH 6"		

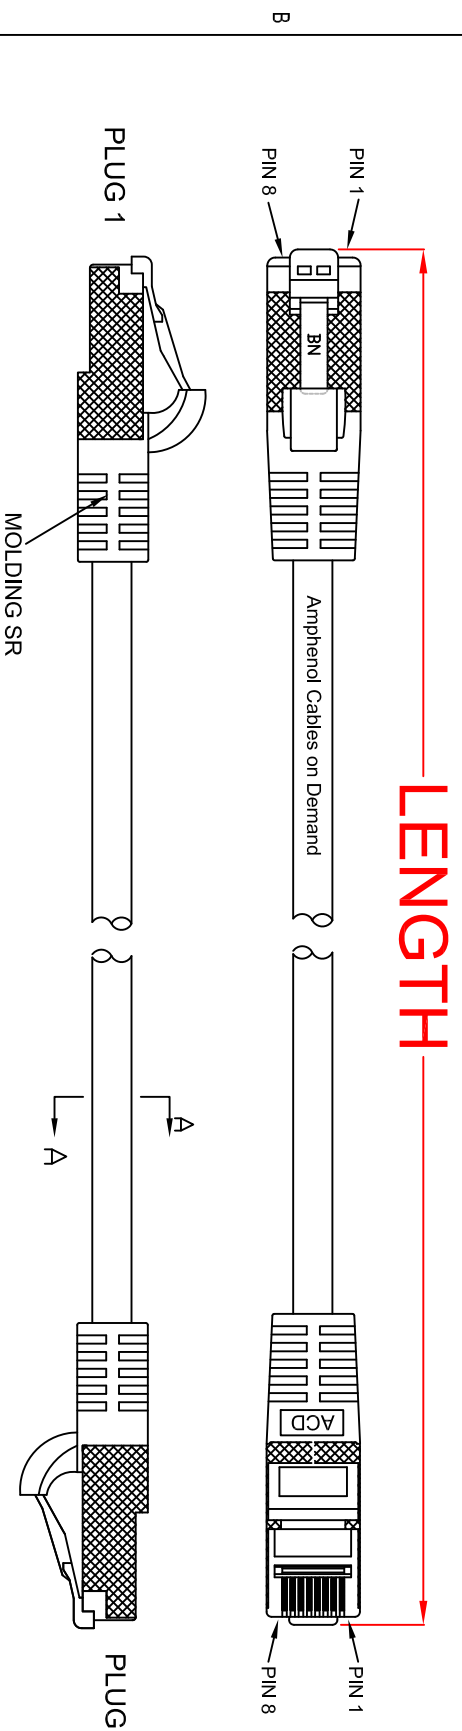

LENGTH & P/N Table

LENGTH	P/N
6 Inch±0.8 Inch	MP-54RJ45SNNX-006In
2FT±1.2 Inch	MP-54RJ45SNNX-002
3FT±1.2 Inch	MP-54RJ45SNNX-003
5FT±2 Inch	MP-54RJ45SNNX-005
7FT±2 Inch	MP-54RJ45SNNX-007
10FT±2 Inch	MP-54RJ45SNNX-010
15FT±2 Inch	MP-54RJ45SNNX-015
25FT±4 Inch	MP-54RJ45SNNX-025
50FT±8 Inch	MP-54RJ45SNNX-050
100FT±8 Inch	MP-54RJ45SNNX-100

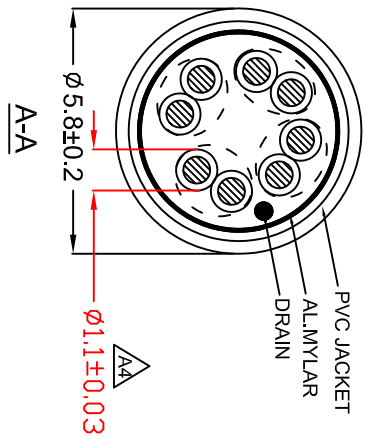

PIN OUT: T568B

PLUG 1	PLUG 2	COLOR
PIN 1	PIN 1	WHITE/ORANGE
PIN 2	PIN 2	ORANGE
PIN 3	PIN 3	WHITE/GREEN
PIN 4	PIN 4	BLUE
PIN 5	PIN 5	WHITE/BLUE
PIN 6	PIN 6	GREEN
PIN 7	PIN 7	WHITE/BROWN
PIN 8	PIN 8	BROWN
Shielded	Shielded	DRAIN WIRE

Beige:MP-54RJ45SNNX-XXX
Black:MP-54RJ45SNNK-XXX



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EQR NO.		20 VALLEY ST. ENDICOTT, NY 13760	
DECIMALS	ANGLES	APPROVALS	DATE	Amphenol Cables on Demand ASM CBL SHIELDED RJ45/RJ45 CAT.5E 4PR MP-54RJ45SNNX-XXX	
.X	±X°	DRAWN	25/NOV/2014		
.XX	±.XX	LF			
.XXX	±.XXX	CHECKED	25/NOV/2014		
THIRD ANGLE PROJECTION		RESP ENG	BA	SIZE	A
MFG ENG				DWG. NO.	MP-54RJ45SNNX-XXX
CAD FILE:				SCALE	SHEET
					OF